






RoHS
Compliant
2002/95/EC




REV.	ECN.	NO.	APPD.


DIMENSIONS

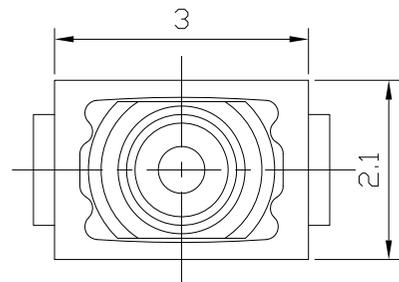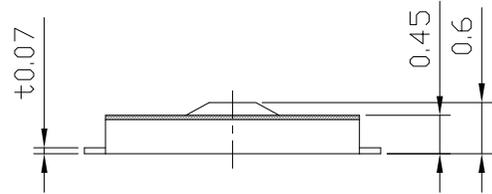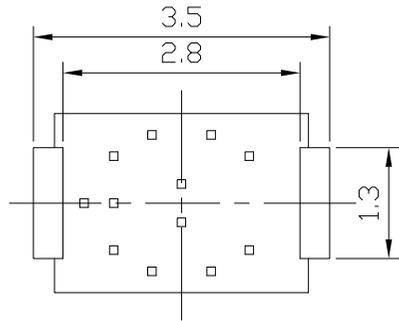


P.C.B MOUNTING PATTERN DIMENSION
The following soldering patterns are recommended for reflow soldering

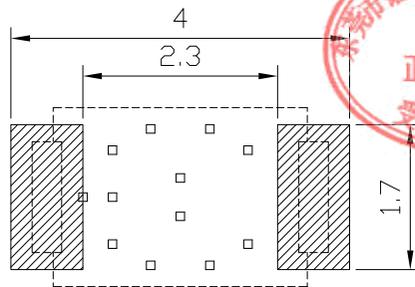

CIRCUIT DIAGRAM



PRODUCT IMAGE



ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

Rating	DC 12V 50mA
Contact Resistance	500mΩ Max.
Travel	0.15 ± 0.1mm
Operating Force	200±50gf
Operating Life(cycles)	100,000



.X ±0.3	X. ±2*	UNITS mm
		MAT'L
		SEE NOTE
		FINISH
		SEE NOTE
		Q'TY
<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNTECH INC.</small>		

东莞市铀高电子制品有限公司			
TITLE: TACT SWITCH		PART NO.: YT-1123	
DR: Ricky 2017/04/06		DWG NO.: ASI-1123	
CHKD: Ricky 2017/04/06		SCALE: 1:1	SHEET: 1/1
APPD:		REV.: A	CUSTOMER DRAWING

