





RoHS
Compliant
2002/95/EC




REV.	ECN.	NO.	APPD.


DIMENSIONS

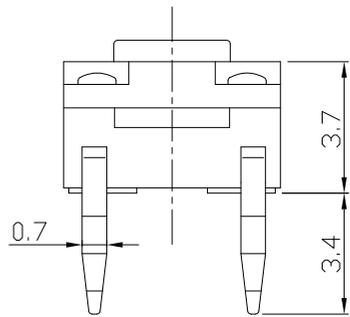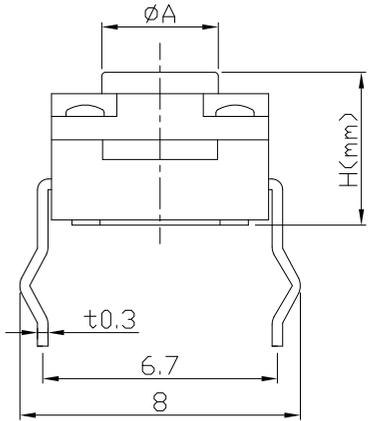

CIRCUIT DIAGRAM





PRODUCT IMAGE



MODEL CODE

	H	ϕA
-	4.3	3.4
A	4.5	3.4
B	4.8	3.4
C	5.0	3.3
D	5.5	3.3
E	6.0	3.3
F	6.5	3.3
G	7.0	3.3
H	7.5	3.4
I	8.0	3.4
J	8.5	3.4
K	9.0	3.3
L	9.5	3.3
M	10.0	3.3
N	10.5	3.3
O	11.0	3.3
P	11.5	3.0
Q	12.0	3.0

P.C.B MOUNTING PATTERN DIMENSION
The following soldering patterns are recommended for reflow soldering

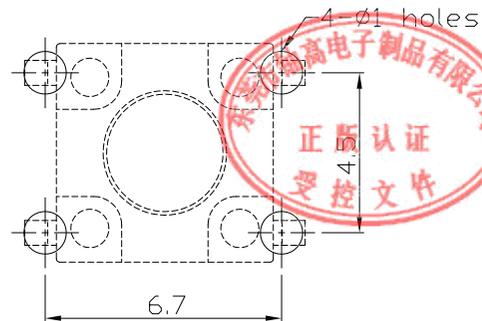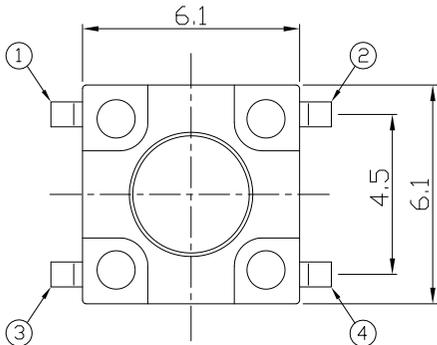

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA
Contact Resistance	100m Ω Max.
Insulation Resistance	100M Ω (DC 500V / 1 min) Min.
Withstanding Voltage	250 VAC / min.
Travel	0.25 \pm 0.1mm
Operating Force	260 \pm 50gf
Operating Life(cycles)	100,000

.X \pm 0.3

X. \pm 2'

UNITS

mm

MAT'L

SEE NOTE

FINISH

SEE NOTE

Q'TY



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

东莞市铰高电子制品有限公司

TITLE:
TACT SWITCH / waterproof

PART NO.:

YT-1141

DR: Ricky 2017/03/23

DWG NO.:

ASI-1141

CHKD: Ricky 2017/03/23

APPD:

SCALE

SHEET

REV.

CUSTOMER DRAWING

1:1

1/1

A

DRAWING