





RoHS
Compliant
2002/95/EC




REV.	ECN.	NO.	APPD.


DIMENSIONS

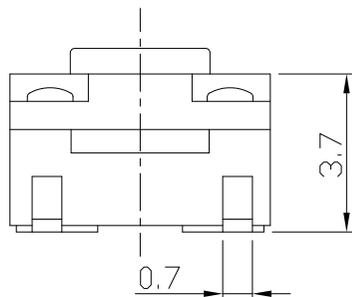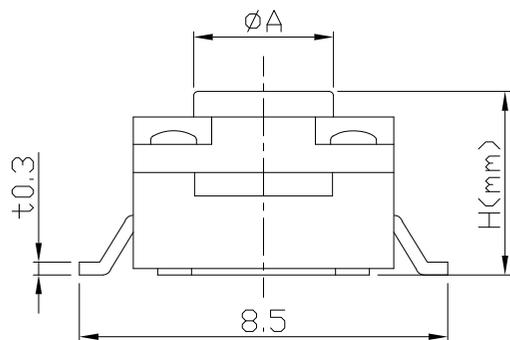

CIRCUIT DIAGRAM



PRODUCT IMAGE





MODEL CODE

	H	ØA
-	4.3	3.4
A	4.5	3.4
B	4.8	3.4
C	5.0	3.3
D	5.5	3.3
E	6.0	3.3
F	6.5	3.3
G	7.0	3.3
H	7.5	3.3
I	8.0	3.3
J	8.5	3.3
K	9.0	3.3
L	9.5	3.3

P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

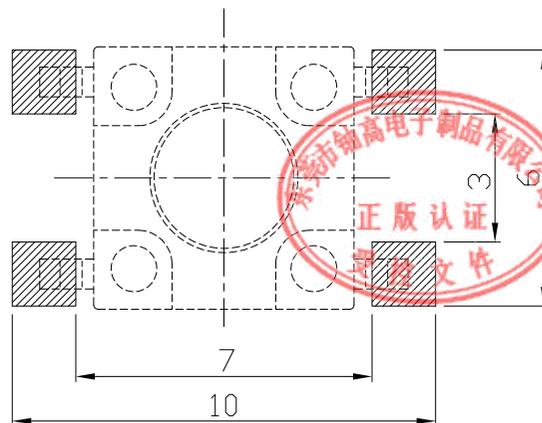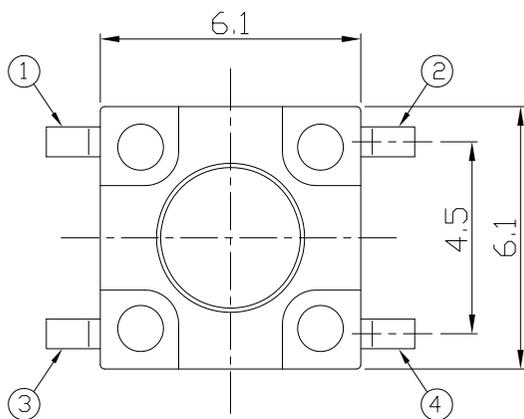

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA
Contact Resistance	100mΩ Max.
Insulation Resistance	100MΩ(DC 500V / 1 min) Min.
Withstanding Voltage	250 VAC / min.
Travel	0.25 ± 0.1mm
Operating Force	260±50gf
Operating Life(cycles)	100,000

.X ±0.3	X. ±2*	UNITS mm
		MAT'L
		SEE NOTE
		FINISH
		SEE NOTE
		Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

东莞市铀高电子制品有限公司

TITLE:
TACT SWITCH / waterproof
DR: Ricky 2017/04/06
CHKD: Ricky 2017/04/06
APPD:

PART NO.:
TY-1141W
DWG NO.:
ASI-1141W
SCALE SHEET REV. CUSTOMER DRAWING
1:1 1/1 A