





RoHS Compliant  
2002/95/EC




REV.	ECN.	NO.	APPD.

### DIMENSIONS

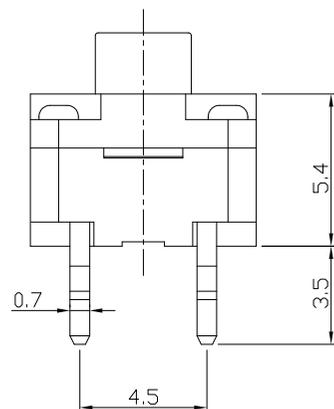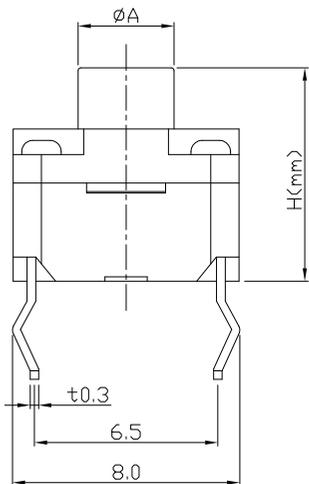

### CIRCUIT DIAGRAM



### PRODUCT IMAGE





### MODEL CODE

	H	ØA
-	6.5	3.5
A	7.0	3.5
B	7.5	3.5
C	8.0	3.5
D	8.5	3.3
E	9.0	3.3
F	9.5	3.3
G	10.0	3.3
H	10.5	3.3
I	11.0	3.3
J	11.5	3.0
K	12.0	3.0
L	12.5	3.0
M	13.0	3.0
N	13.5	3.0
□	14.0	3.0
P	14.5	3.0
Q	15.0	3.0
R	15.5	3.0
S	16.0	3.0
T	16.5	3.0
U	17.0	3.0

### P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

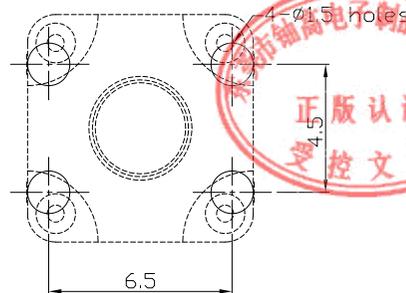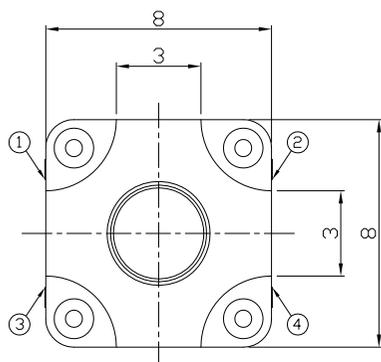

### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA
Contact Resistance	100mΩ Max.
Insulation Resistance	100MΩ(DC 500V / 1 min) Min.
Withstanding Voltage	250 VAC / min.
Travel	0.25 ± 0.1mm
Operating Force	250±50gf
Operating Life(cycles)	100,000



.X ±0.3	X. ±2'	UNITS mm	东莞市铀高电子制品有限公司			
		MAT'L				
		SEE NOTE	TITLE: TACT SWITCH / waterproof	PART NO.: YT-1142		
		FINISH	DR: Ricky 2017/03/23	DWG NO.: ASI-1142		
		SEE NOTE	CHKD: Ricky 2017/03/23	SCALE	SHEET	REV.
		Q'TY	APPD:	1:1	1/1	A
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNTECH INC.						CUSTOMER DRAWING