




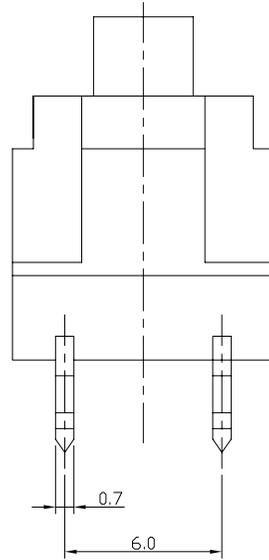


RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.


**DIMENSIONS**

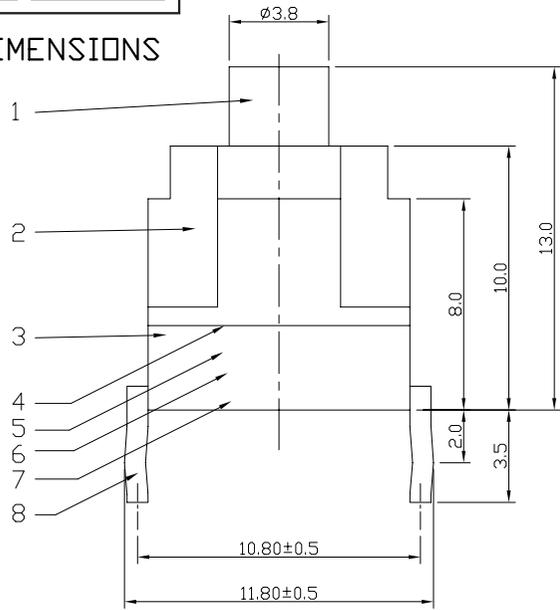

CIRCUIT DIAGRAM

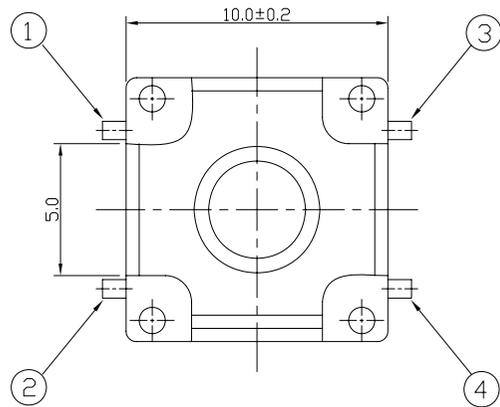

**P.C.B MOUNTING PATTERN DIMENSION**

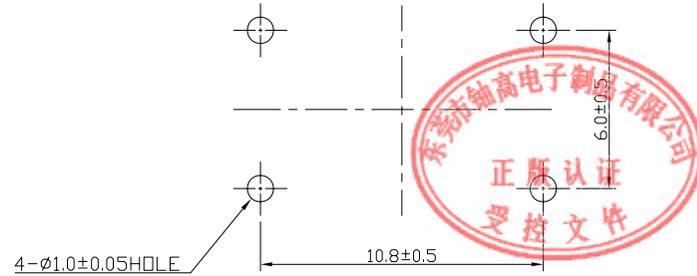

**ELECTRO-MECHANICAL CHARACTERISTICS**

Refer to additional specifications

RATING	DC12V 50mA	
CONTACT RESISTANCE	500mΩ MAX.	
TRAVEL	0.3 <sup>+0.2</sup> <sub>-0.1</sub> mm	
OPERATING FORCE	160±50gf	250±70gf
OPERATING LIFE(cycles)	100,000	

8	TERMINAL	C2680-EH	1								
7	CASE	NYLON66	1								
6	CONTACT	SUS 301	1								
5	STEM	NYLON46	1								
4	CAPTON TAPE	TAPE	1								
3	RUBBER	NBR	1								
2	COVER	NYLON66	1								
1	KNOB	NYLON66	1								
NO.	PARTS	MATERIAL	Q'TY	FINISHING							

UNITS		mm	
MAT'L		SEE NOTE	
FINISH		SEE NOTE	
Q'TY		SEE NOTE	
TITLE:		TACT SWITCH/waterproof	
DR:		Ricky 2015/04/30	
CHKD:		Ricky 2015/04/30	
APPD:			
PART NO.:		YT-1147	
DWG NO.:		AKS-1147	
SCALE	SHEET	REV.	CUSTOMER DRAWING
1:1	1/1	A	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

