









REV.	ECN.	NO.	APPD.

DIMENSIONS



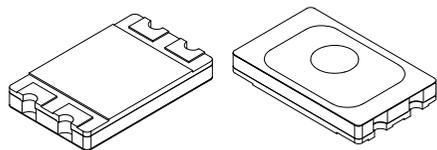


CIRCUIT DIAGRAM

MODEL CODE

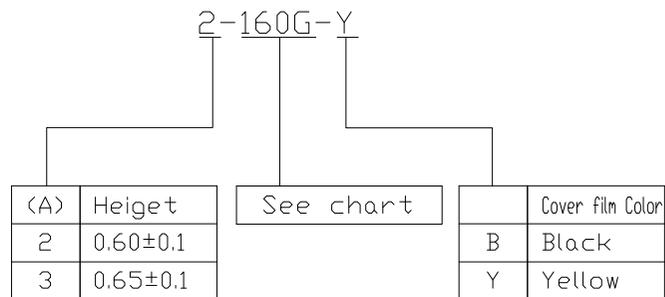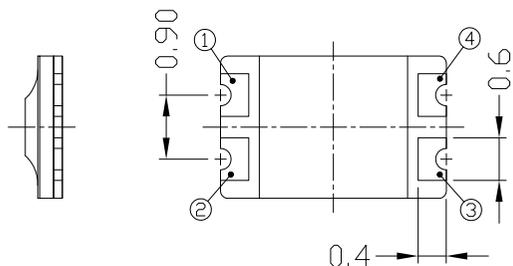

RECOMMEND LAND PATTERN

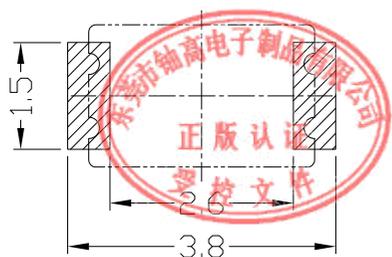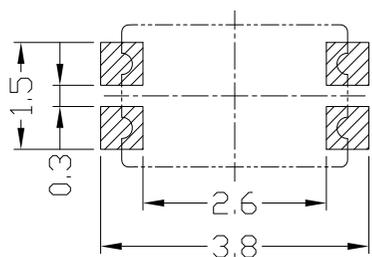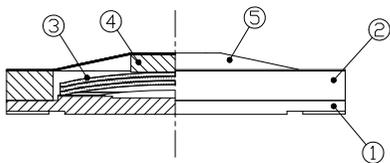

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.13±0.05mm	
Operating Force	160±30gf	180±30gf
	200±30gf	240±30gf
Operating Life(cycles)	500,000	

5	Cover film	Polyimide & Epoxy	1	
4	Actuator	Polyimide & Epoxy	1	
3	Metal dome	SUS301	1~3	Ag plating
2	Guide film	Polyimide & Epoxy	1	
1	PCB	Cu PSR	1	Au+Ni plating
NO.	PARTS	METERIAL	Q'TY	FINISHING

General Tolerance	
Dimension	mm (°)
X	±0.2
X.X	±0.1
X.XX	±0.05
X.XXX	±0.01
ANGLE	±1°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	mm	
MAT'L	SEE NOTE	
FINISH	SEE NOTE	
Q'TY	SEE NOTE	

东莞市铀高电子制品有限公司			
TITLE:	SMD DOME SWITCH	PART NO.:	YT-3220
DR:	Ricky 2019/04/09	DWG NO.:	AKS-3220
CHKD:	Ricky 2019/04/09	SCALE	1:1
APPD:		SHEET	1/1
		REV.	A
		CUSTOMER DRAWING	