



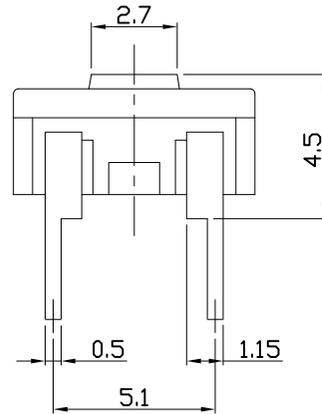


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

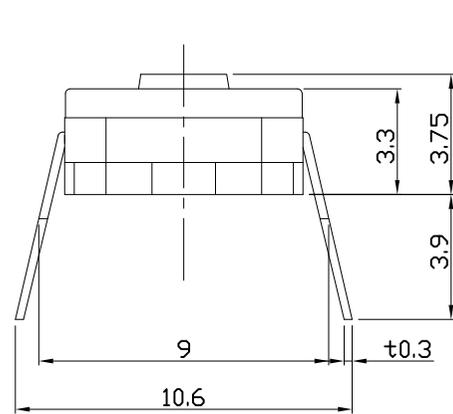

CIRCUIT DIAGRAM





PRODUCT IMAGE



P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

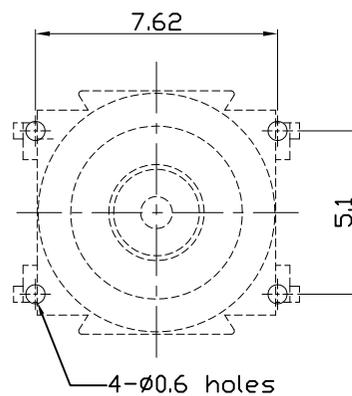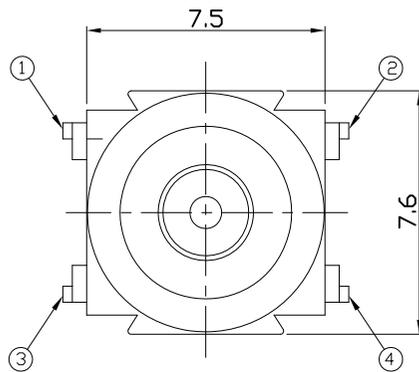

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 0.1A	
Contact Resistance	100mΩ Max.	
Insulation Resistance	100MΩ (DC 500V / 1 min) Min.	
Withstanding Voltage	250 VAC / min.	
Travel	0.45 ± 0.15mm	
Operating Force	300±80gf	160±50gf
Operating Life(cycles)	100,000	

.X ±0.3	X. ±2'
UNITS	mm
MAT'L	SEE NOTE
FINISH	SEE NOTE
Q'TY	SEE NOTE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS				mm			
MATERIAL				SEE NOTE			
FINISH				SEE NOTE			
QTY				SEE NOTE			
TITLE:				PART NO.:			
TACT SWITCH Soft feeling				YT-1155			
DRAWN BY: Ricky 2014/04/01				DRAWING NO.:			
CHECKED BY: Ricky 2014/04/01				ASI-1155			
APPD:				SCALE		SHEET	
				1:1		1/1	
				REV.		CUSTOMER DRAWING	
				A			

东莞市铀高电子制品有限公司

TITLE:
TACT SWITCH Soft feeling

PART NO.:
YT-1155

DR: Ricky 2014/04/01
CHKD: Ricky 2014/04/01

DWG NO.:
ASI-1155

SCALE: 1:1
SHEET: 1/1
REV.: A
CUSTOMER DRAWING