

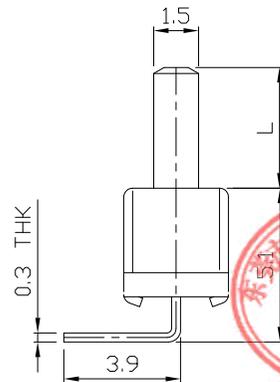


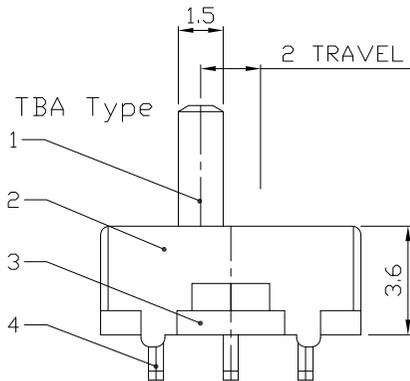




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS



MODEL CODE

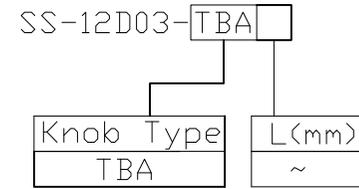

P.C.B LAYOUT BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	150±80gf
OPERATING LIFE(cycles)	10,000



8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	东莞市铀高电子制品有限公司			
7					OVER 1.5mm: ±0.2mm	MAT'L					
6						SEE NOTE		TITLE:	PART NO.:		
5	CONTACT CLIP	PBS STRIP	1	Ag PLATED				SLIDE SWITCH / VERTICAL	SS-12D03		
4	TERMINAL	BRASS STRIP	3	Ag PLATED				DR:	Ricky 2015/07/07		
3	BASE	PHENOLIC RESIN	1	NATURAL				CHKD:	Ricky 2015/07/07		
2	FRAME	STEEL STRIP	1	Ni PLATED				APPD:			
1	KNOB	POM	1	BLACK				SCALE	SHEET	REV.	CUSTOMER
NO.	PARTS	MATERIAL	Q'TY	FINISHING				5:1	1/1	A	DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

