

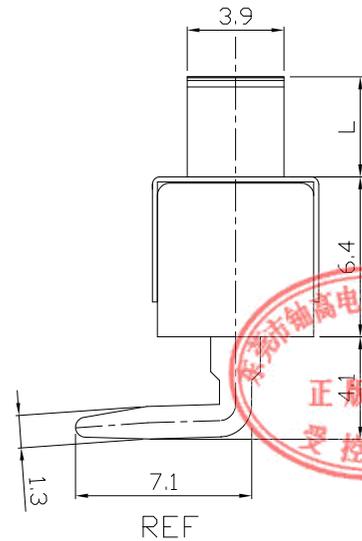


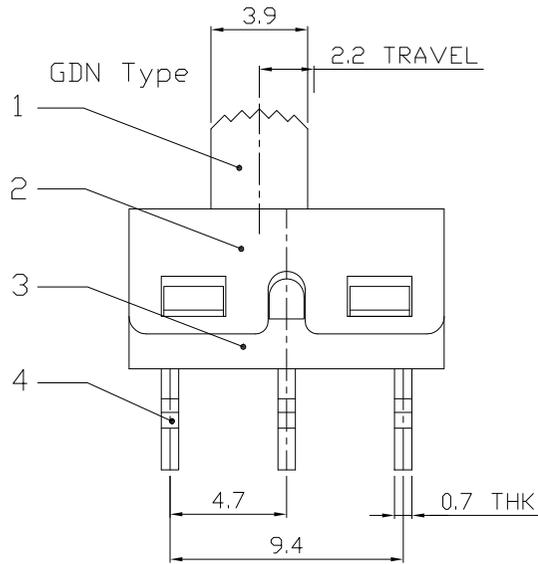



RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.


### DIMENSIONS

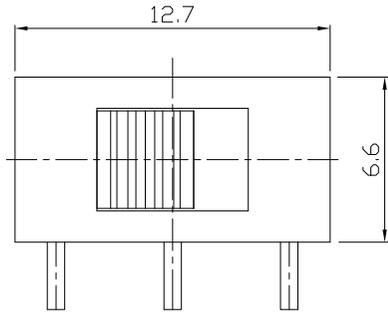

### MODEL CODE

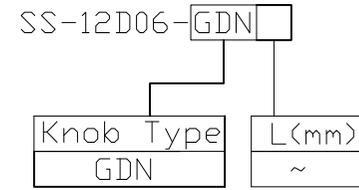

P.C.B LAYOUT  
BOTTOM VIEW



CIRCUIT DIAGRAM

### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	2A 125V AC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2.2mm
OPERATING FORCE	200±50gf
OPERATING LIFE(cycles)	10,000



8					
7	STEEL BALL	STEEL	1	NATURAL	
6	SPRING	STEEL WIRE	1	NATURAL	
5	CONTACT	BRASS STRIP	1	Ag PLATED	
4	TERMINAL	BRASS STRIP	3	Ag PLATED	
3	CASE	PA66	1	BLACK	
2	COVER	SUS	1	NATURAL	
1	KNOB	PA66	1	BLACK	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

WITHIN 1.5mm: ±0.1mm  
OVER 1.5mm: ±0.2mm

UNITS mm

MAT'L SEE NOTE

FINISH SEE NOTE

Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.

<b>东莞市铀高电子制品有限公司</b>			
TITLE: SLIDE SWITCH / VERTICAL		PART NO.: SS-12D06	
DR: <i>Ricky</i> 2015/07/07		DWG NO.: ADL-12D06	
CHKD: <i>Ricky</i> 2015/07/07		SCALE: 3:1	SHEET: 1/1
APPD:		REV.: A	CUSTOMER DRAWING