



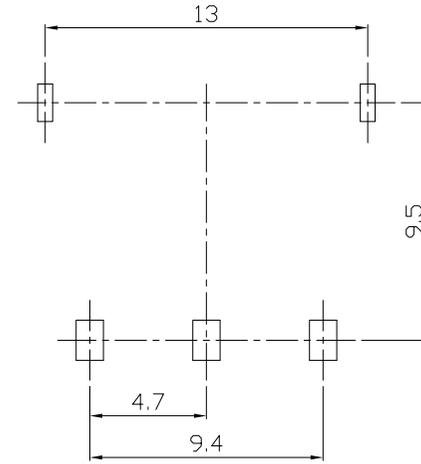



RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

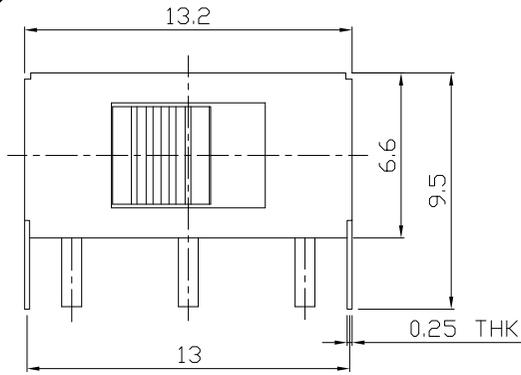

MODEL CODE

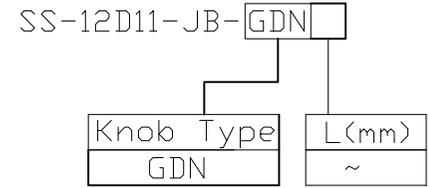



P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	2A 125V AC
CIRCUIT	1P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2.2mm
OPERATING FORCE	300±150gf
OPERATING LIFE(cycles)	10,000

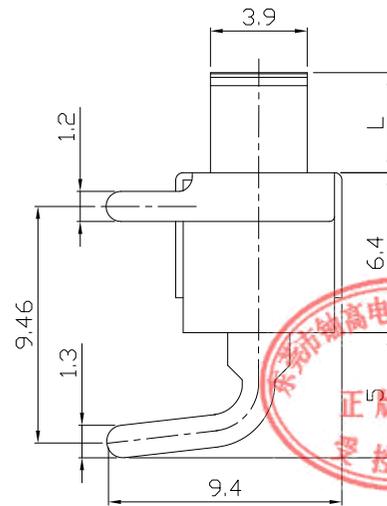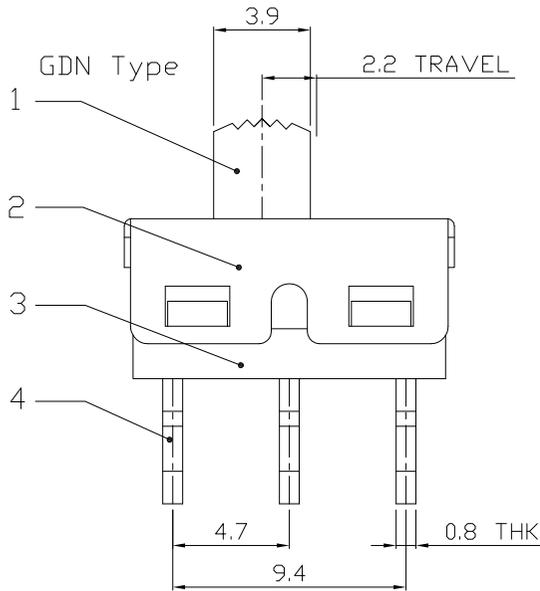

8					
7	STEEL BALL	STEEL	1	NATURAL	WITHIN 1.5mm: ±0.1mm
6	SPRING	STEEL WIRE	1	NATURAL	OVER 1.5mm: ±0.2mm
5	CONTACT	COPPER STRIP/BRASS STRIP	1	Ag PLATED OVER Ni PLATED	
4	TERMINAL	COPPER STRIP/BRASS STRIP	3	Ag PLATED OVER Ni PLATED	
3	CASE	NYLON+F.G+94V0	1	BLACK	
2	COVER	SUS	1	NATURAL/Sn PLATED	
1	KNOB	NYLON+F.G+94V0	1	BLACK	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	mm
MAT'L	SEE NOTE
FINISH	SEE NOTE
Q'TY	

东莞市铀高电子制品有限公司			
TITLE: SLIDE SWITCH / VERTICAL		PART NO.: SS-12D11-JB	
DR: Ricky 2015/06/09		DWG NO.: ADJ-12D11-JB	
CHKD: Ricky 2015/06/09		SCALE	SHEET
APPD:		3:1	1/1
		REV.	CUSTOMER DRAWING
		A	