







RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS





MODEL CODE

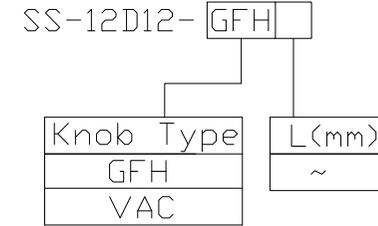

P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

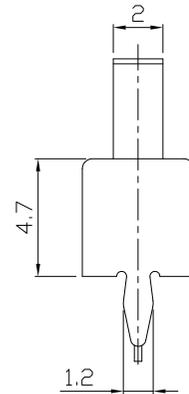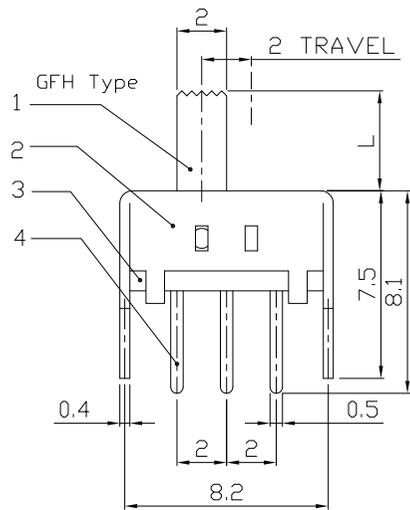

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000



8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	东莞市铀高电子制品有限公司						
7					OVER 1.5mm: ±0.2mm	MAT'L								
6	SPRING PLATE	SUS	1	NATURAL		SEE NOTE		TITLE:	SLIDE SWITCH / VERTICAL			PART NO.:	SS-12D12	
5	CONTACT	PBS	1	Ag CLAD				DR:	Ricky 2016/08/04			DWG NO.:	AZJ-12D12	
4	TERMINAL	BRASS	1	Ag PLATED				CHKD:	Ricky 2016/08/04			SCALE	3:1	
3	TERMINAL CASE	PHENOLIC RESIN	1	NATURAL				APPD:			SHEET	1/1	REV.	A
2	COVER	MILD STEEL	1	Ni PLATED							CUSTOMER	DRAWING		
1	KNOB	NYLON+F.G	1	BLACK										
NO.	PARTS	MATERIAL	Q'TY	FINISHING										

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.