

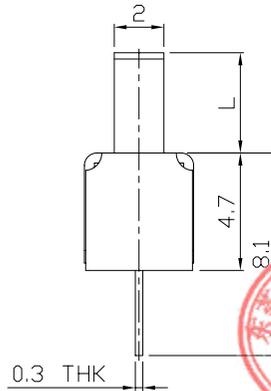
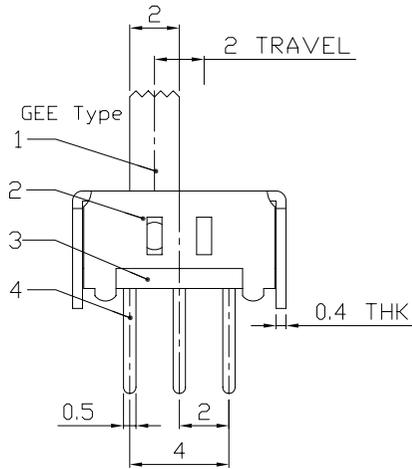




RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

### DIMENSIONS





### MODEL CODE

SS-12D29-GEE

Knob Type
GEE
VAC

L(mm)
~



P.C.B LAYOUT  
BOTTOM VIEW

CIRCUIT DIAGRAM

### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000



8						
7						
6	SPRING PLATE	SUS	1	NATURAL		
5	CONTACT CLIP	PBS C5210R-EH	1	Ag CLAD		
4	TERMINAL	BRASS STRIP	3	Ag PLATED OVER Ni PLATED		
3	BASE	PHENOLIC RESIN	1	NATURAL		
2	FRAME	STEEL STRIP	1	Ni PLATED		
1	KNOB	POM	1	BLACK		
NO.	PARTS	MATERIAL	Q'TY	FINISHING		

WITHIN 1.5mm: ±0.1mm  
OVER 1.5mm: ±0.2mm

UNITS mm

MAT'L

SEE NOTE

FINISH

SEE NOTE

Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

<b>东莞市铀高电子制品有限公司</b>			
TITLE: SLIDE SWITCH / VERTICAL		PART NO.: SS-12D29	
DR: <i>Ricky</i> 2015/06/09		DWG NO.: ADJ-12D29	
CHKD: <i>Ricky</i> 2015/06/09		SCALE	SHEET
APPD:		4:1	1/1
		REV.	CUSTOMER DRAWING
		A	