

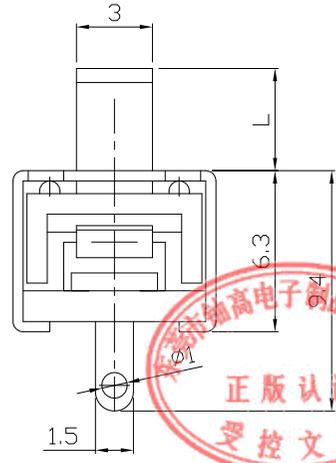


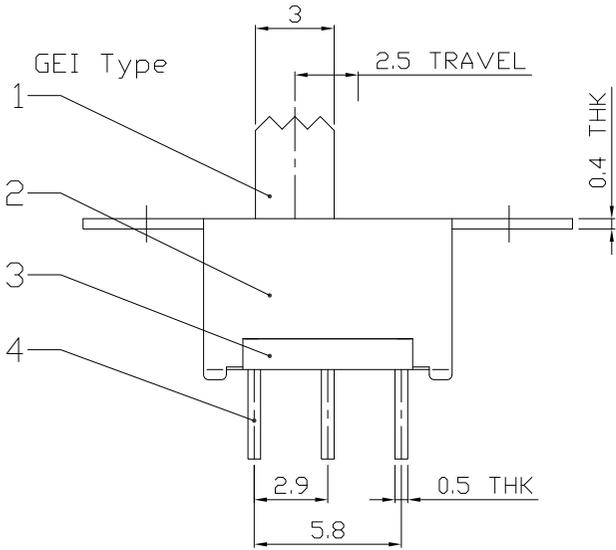

RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.



DIMENSIONS

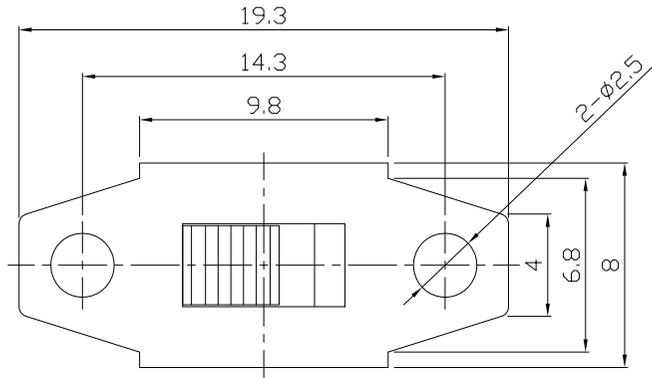

MODEL CODE

SS-12E06-GEI

Knob Type	L(mm)
GEI	~

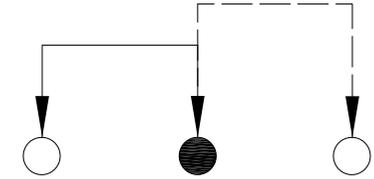

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	1A 250V AC / 2A 125V AC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2.5mm
OPERATING FORCE	200±100gf
OPERATING LIFE(cycles)	10,000

8				
7	STEEL BALL	STEEL	1	NATURAL
6	SPRING	STEEL WIRE	1	NATURAL
5	CONTACT	COPPER STRIP	1	Ag PLATED
4	TERMINAL	BRASS STRIP	3	Ag PLATED
3	BASE	PHENOLIC RESIN	1	BLACK
2	FRAME	STEEL STRIP	1	Ni PLATED
1	KNOB	9T	1	BLACK
NO.	PARTS	MATERIAL	Q'TY	FINISHING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

WITHIN 1.5mm: ±0.1mm	UNITS mm	东莞市铀高电子制品有限公司			
OVER 1.5mm: ±0.2mm	MAT'L				
	SEE NOTE	TITLE: SLIDE SWITCH / VERTICAL	PART NO.: SS-12E06		
	FINISH	DR: Ricky 2016/02/17	DWG NO.: ADL-12E06		
	SEE NOTE	CHKD: Ricky 2016/02/17	SCALE	SHEET	REV.
	Q'TY	APPD:	3:1	1/1	A
			CUSTOMER DRAWING		