





RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.


### DIMENSIONS

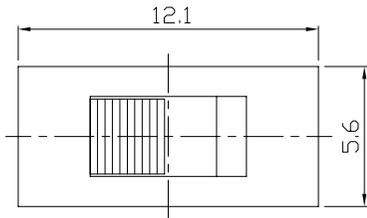

### MODEL CODE

SS-12F44-GBG

Knob Type	L(mm)
GBG	~
VAA	~

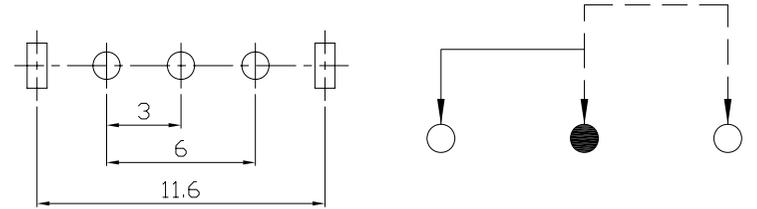



P.C.B LAYOUT  
BOTTOM VIEW

CIRCUIT DIAGRAM

### ELECTRO-MECHANICAL CHARACTERISTICS


Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3.2mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000

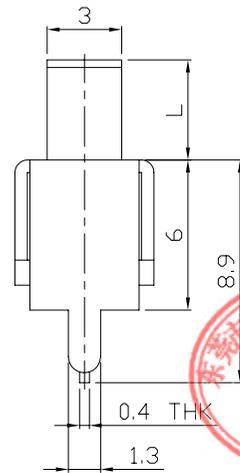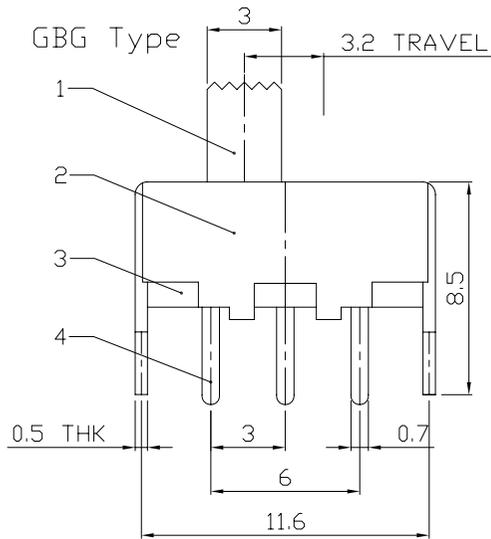

8							
7							
6	SPRING	STEEL WIRE	1	NATURAL	WITHIN 1.5mm: ±0.1mm	UNITS	mm
5	CONTACT	BRASS STRIP	1	Ag PLATED	OVER 1.5mm: ±0.2mm	MAT'L	
4	TERMINAL	BRASS STRIP	3	Ag PLATED		SEE NOTE	TITLE: SLIDE SWITCH / VERTICAL
3	CASE	PHENOLIC RESIN	1	NATURAL		FINISH	
2	FRAME	STEEL STRIP	1	Ni PLATED		SEE NOTE	DR: <i>Ricky</i> 2015/07/09
1	KNOB	POM	1	BLACK		Q'TY	CHKD: <i>Ricky</i> 2015/07/09
NO.	PARTS	MATERIAL	Q'TY	FINISHING			APPD:
							SCALE
							SHEET
							REV.
							CUSTOMER
							DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.



东莞市铀高电子制品有限公司

TITLE: SLIDE SWITCH / VERTICAL	PART NO.: SS-12F44
DR: <i>Ricky</i> 2015/07/09	DWG NO.: ADL-12F44
CHKD: <i>Ricky</i> 2015/07/09	SCALE
APPD:	SHEET
	REV.
	CUSTOMER
	DRAWING