

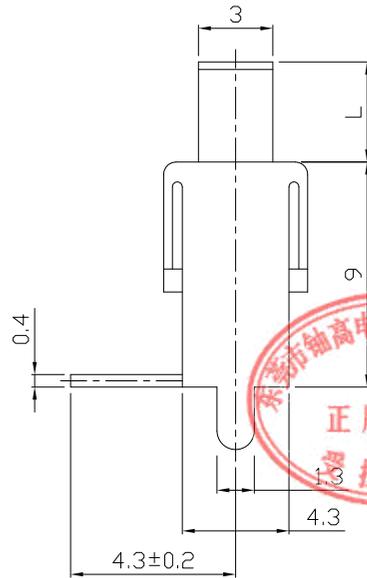
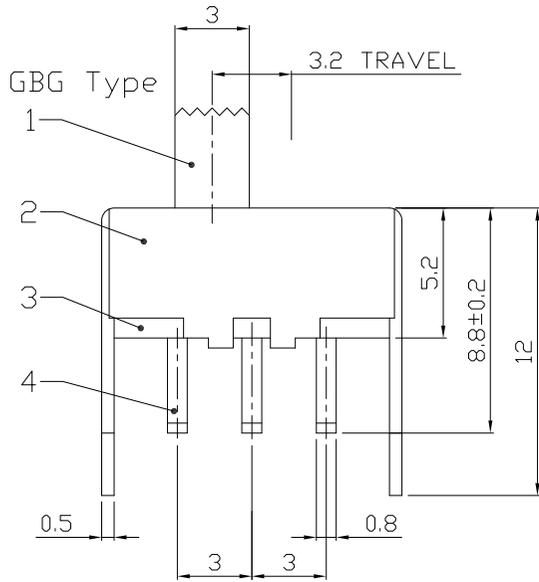




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

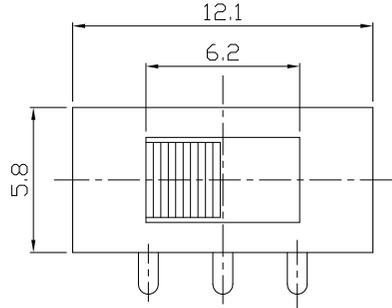


MODEL CODE

SS-12F50-GBG

Knob Type	L(mm)
GBG	~
VAA	~



P.C.B LAYOUT
BOTTOM VIEW

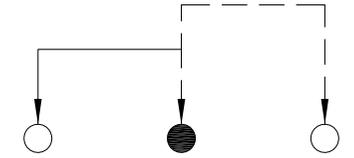

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3.2mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000



8					WITHIN 1.5mm: ±0.1mm	UNITS	mm
7					OVER 1.5mm: ±0.2mm	MAT'L	
6	CONTACT (CLIP)	P.B.S STRIP	1	Ag CLAD		SEE NOTE	
5	SPRING	STEEL WIRE	1	Ni PLATED			
4	TERMINAL	BRASS STRIP	3	Ag PLATED			
3	TERMINAL BASE	PHENOLIC RESIN	1	NATURAL		FINISH	
2	FRAME	STEEL STRIP	1	Ni PLATED		SEE NOTE	
1	KNOB	POM	1	BLACK		Q'TY	
NO.	PARTS	MATERIAL	Q'TY	FINISHING			

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.

东莞市铀高电子制品有限公司			
TITLE: SLIDE SWITCH / VERTICAL		PART NO.: SS-12F50	
DR: <i>Ricky</i> 2015/07/13		DWG NO.: ADL-12F50	
CHKD: <i>Ricky</i> 2015/07/13		SCALE	SHEET
APPD:		3:1	1/1
		REV.	CUSTOMER DRAWING
		A	