







RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS





MODEL CODE

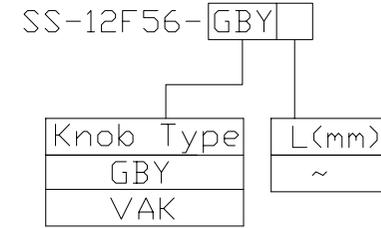

P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

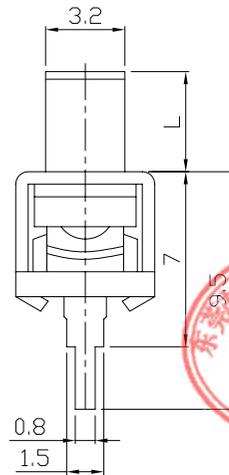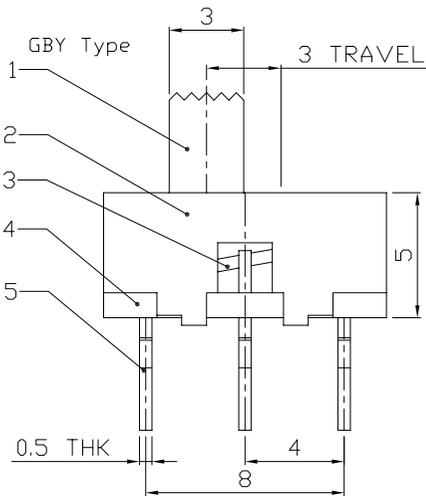

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3mm
OPERATING FORCE	200±100gf
OPERATING LIFE(cycles)	10,000



8					WITHIN 1.5mm: ±0.1mm	UNITS mm
7					OVER 1.5mm: ±0.2mm	MAT'L
6	SPRING	STEEL WIRE	1	NATURAL		SEE NOTE
5	TERMINAL	BRASS STRIP	3	Ag PLATED OVER Ni PLATED		
4	BASE	PHENDLIC RESIN	1	YELLOW		FINISH
3	CONTACT	BRASS STRIP	1	Ag PLATED OVER Ni PLATED		SEE NOTE
2	FRAME	STEEL STRIP	1	BLACK		Q'TY
1	KNOB	PDM	1	BLACK		
NO.	PARTS	MATERIAL	Q'TY	FINISHING		

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

东莞市铀高电子制品有限公司			
TITLE: SLIDE SWITCH / VERTICAL		PART NO.: SS-12F56	
DR: <i>Ricky</i> 2015/06/09		DWG NO.: ADJ-12F56	
CHKD: <i>Ricky</i> 2015/06/09		SCALE	SHEET
APPD:		4:1	1/1
		REV.	CUSTOMER DRAWING
		A	