







RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS


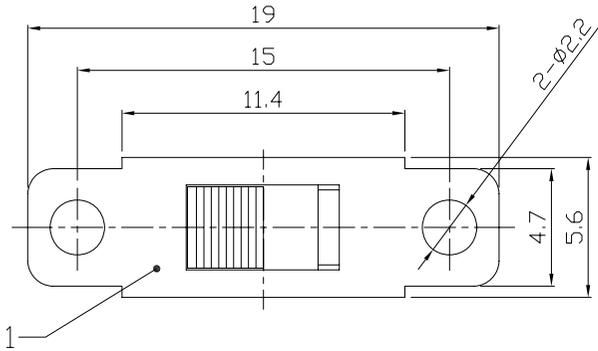


MODEL CODE

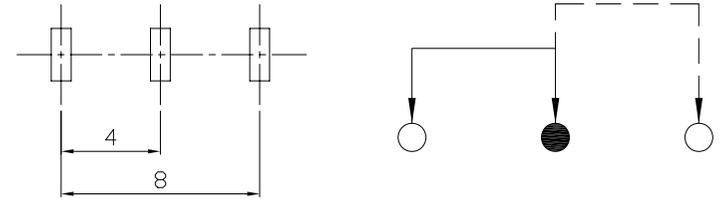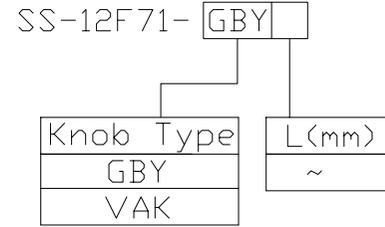

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

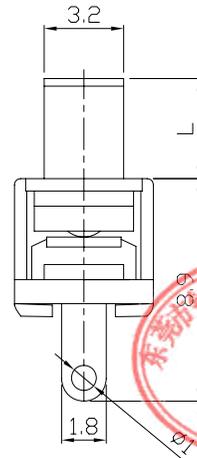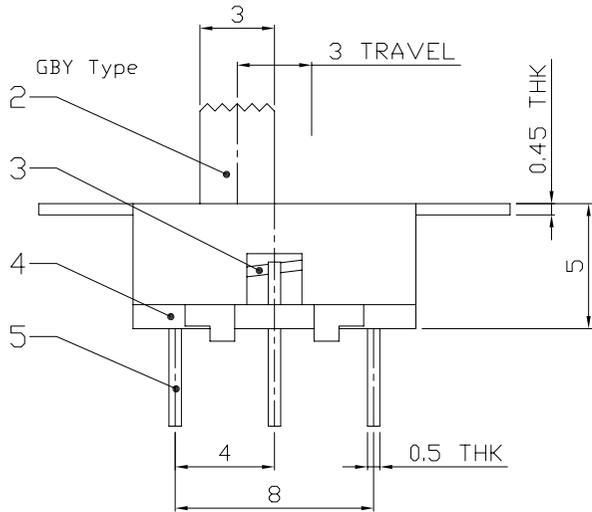

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3mm
OPERATING FORCE	200±100gf
OPERATING LIFE(cycles)	10,000



8					
7	SPRING	STEEL WIRE	1	NATURAL	WITHIN 1.5mm: ±0.1mm
6	STEEL BALL	STEEL	1	NATURAL	OVER 1.5mm: ±0.2mm
5	TERMINAL	BRASS STRIP	3	Ag PLATED OVER Ni PLATED	
4	BASE	PHENDLIC RESIN	1	NATURAL	
3	CONTACT	BRASS STRIP	1	Ag PLATED	
2	KNOB	POM	1	BLACK	
1	FRAME	STEEL STRIP	1	BLACK	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

WITHIN 1.5mm: ±0.1mm
OVER 1.5mm: ±0.2mm

UNITS mm

MAT'L SEE NOTE

FINISH SEE NOTE

Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.

东莞市铀高电子制品有限公司			
TITLE: SLIDE SWITCH / VERTICAL		PART NO.: SS-12F71	
DR: <i>Ricky</i> 2015/06/09		DWG NO.: ADJ-12F71	
CHKD: <i>Ricky</i> 2015/06/09		SCALE: 3:1	SHEET: 1/1
APPD:	REV.: A	CUSTOMER DRAWING	