





RoHS  
Compliant  
2002/95/EC

MODEL CODE


SS-12L04-GBG

REV.	ECN.	NO.	APPD.


DIMENSIONS

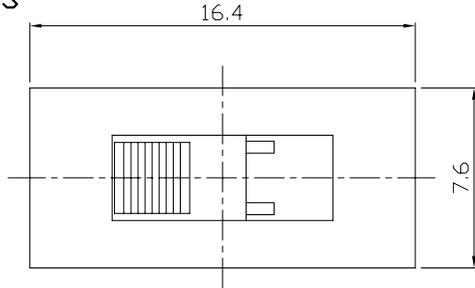

Knob Type	L(mm)
GBG	~
VAA	~

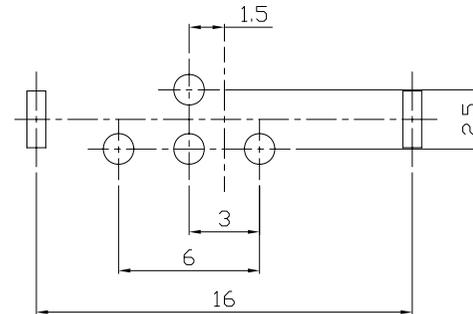

P.C.B LAYOUT  
BOTTOM VIEW





CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	6mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

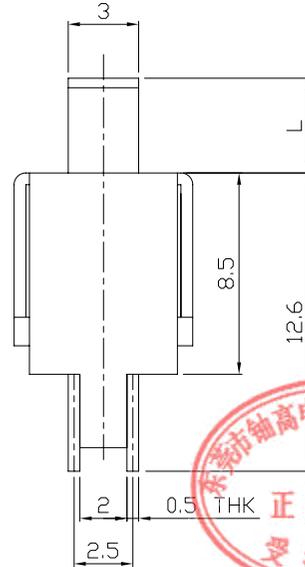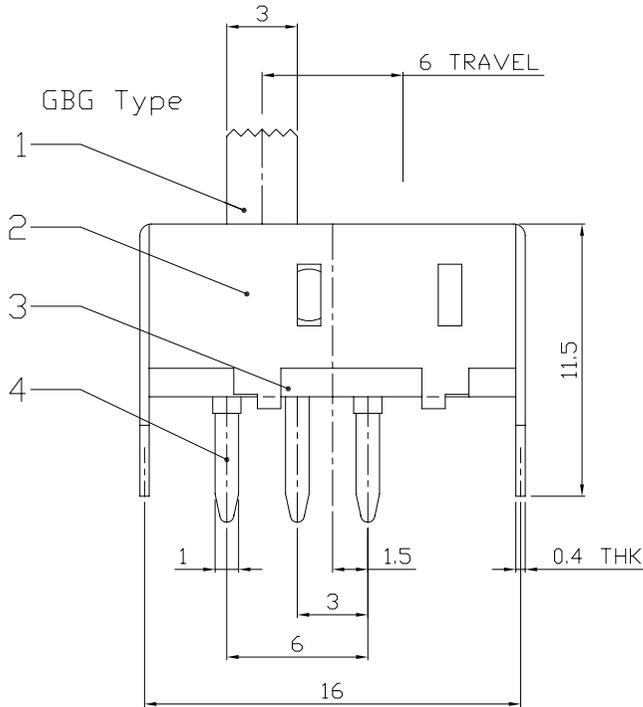

8					
7	STEEL BALL	STEEL	2	NATURAL	WITHIN 1.5mm: ±0.1mm
6	SPRING	STEEL WIRE	2	NATURAL	OVER 1.5mm: ±0.2mm
5	CONTACT	BRASS STRIP	1	Ag PLATED	
4	TERMINAL	BRASS STRIP	4	Ag PLATED	
3	BASE	PHENOLIC RESIN	1	BLACK	
2	FRAME	STEEL STRIP	1	Ni PLATED	
1	KNOB	POM	1	BLACK	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	mm	东莞市铀高电子制品有限公司						
MAT'L	SEE NOTE							
FINISH	SEE NOTE	TITLE:	SLIDE SWITCH / VERTICAL					
Q'TY	SEE NOTE	PART NO.:	SS-12L04					
		DR:	Ricky 2015/07/13		DWG NO.:	ADL-12L04		
		CHKD:	Ricky 2015/07/13		SCALE	SHEET	REV.	CUSTOMER DRAWING
		APPD:	5:2	1/1	A			