



RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.





MODEL CODE

SS-13D10-GFB

Knob Type
GFB
VAC



L(mm)
~

DIMENSIONS

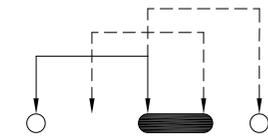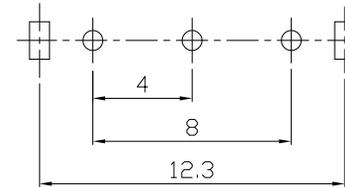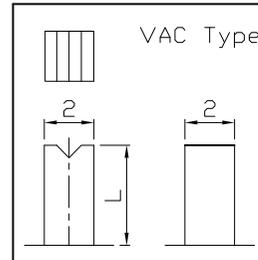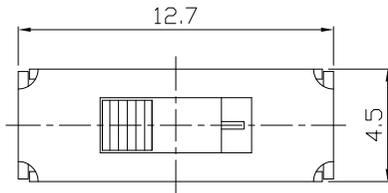

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

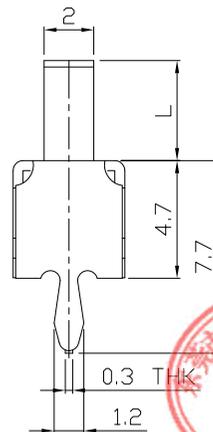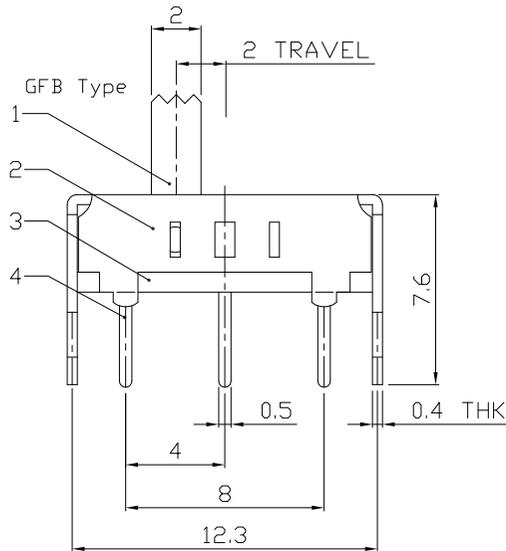

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000



8							
7							
6	SPRING PLATE	SUS	1	NATURAL	WITHIN 1.5mm: ±0.1mm	UNITS	mm
5	CONTACT CLIP	PBS STRIP	1	Ag CLAD	OVER 1.5mm: ±0.2mm	MAT'L	
4	TERMINAL	BRASS STRIP	3	Ag CLAD		SEE NOTE	TITLE: SLIDE SWITCH / VERTICAL
3	BASE	PHENOLIC RESIN	1	NATURAL		FINISH	
2	FRAME	STEEL STRIP	1	Ni PLATED		SEE NOTE	DR: <i>Ricky</i> 2015/07/07
1	KNOB	POM	1	BLACK		Q'TY	CHKD: <i>Ricky</i> 2015/07/07
NO.	PARTS	MATERIAL	Q'TY	FINISHING			APPD:
							SCALE
							SHEET
							REV.
							CUSTOMER
							DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.



东莞市铀高电子制品有限公司

4:1 1/1 A CUSTOMER DRAWING