



RoHS  
Compliant  
2002/95/EC




REV.	ECN.	NO.	APPD.

MODEL CODE

SS-13F03-GBG

Knob Type	L(mm)
GBG	~

DIMENSIONS

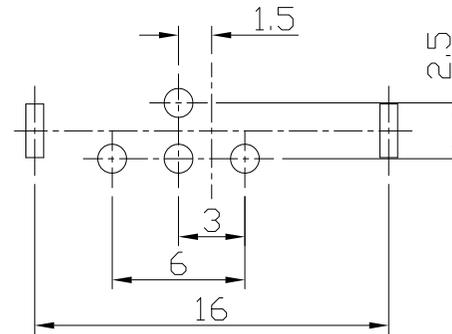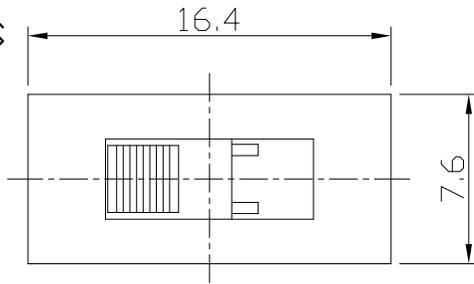



P.C.B LAYOUT  
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	3mm
OPERATING FORCE	300±100gf
OPERATING LIFE(cycles)	10,000

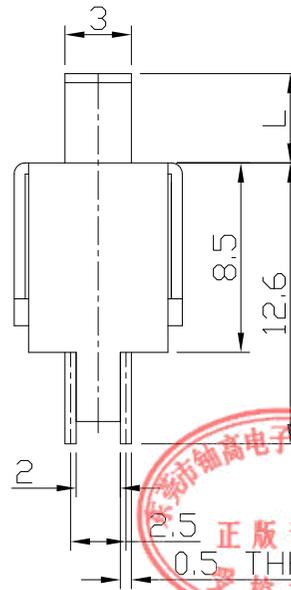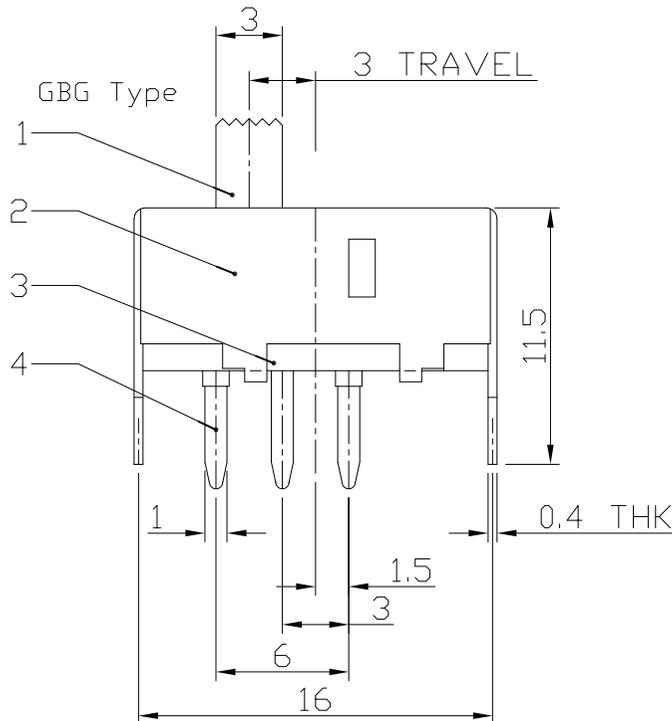

8					
7	STEEL BALL	STEEL	2	NATURAL	WITHIN 1.5mm: ±0.1mm
6	SPRING	STEEL WIRE	2	NATURAL	OVER 1.5mm: ±0.2mm
5	CONTACT	BRASS STRIP	1	Ag PLATED	
4	TERMINAL	BRASS STRIP	4	Ag PLATED	
3	BASE	PHENOLIC RESIN	1	BLACK	
2	FRAME	STEEL STRIP	1	Ni PLATED	
1	KNOB	POM	1	BLACK	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

UNITS mm  
MAT'L SEE NOTE  
FINISH SEE NOTE  
Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS mm

MAT'L SEE NOTE

FINISH SEE NOTE

Q'TY

东 莞 市 铀 高 电 子 制 品 有 限 公 司

TITLE: SLIDE SWITCH / VERTICAL PART NO.: SS-13F03

DR: Ricky 2015/07/14 DWG NO.: ADL-13F03

CHKD: Ricky 2015/07/14

APPD:

SCALE	SHEET	REV.	CUSTOMER DRAWING
5:2	1/1	A	