







RoHS Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS


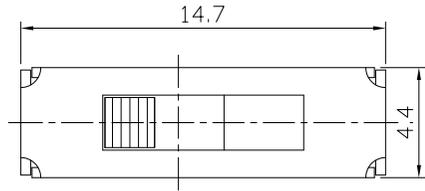


MODEL CODE

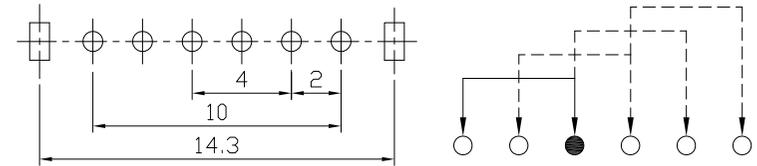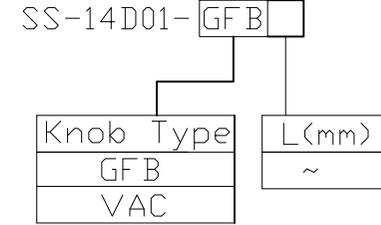

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

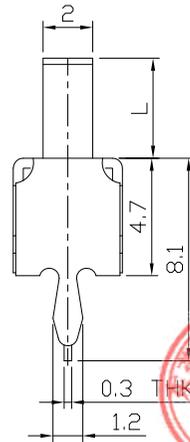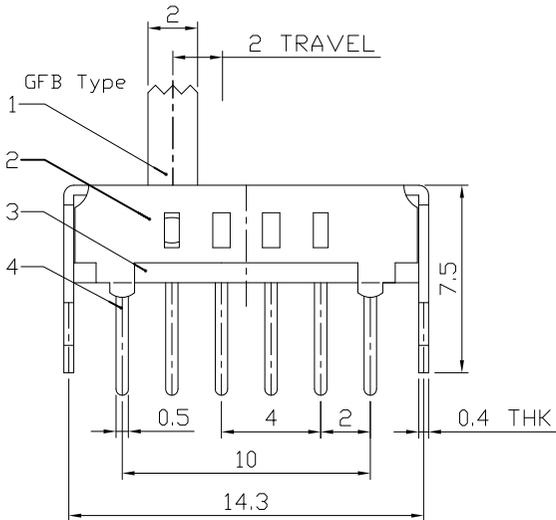

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P4T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000



8					WITHIN 1.5mm: ±0.1mm	UNITS mm	东莞市铀高电子制品有限公司			
7					OVER 1.5mm: ±0.2mm	MAT'L				
6	SPRING PLATED	PBS STRIP	1	NATURAL		SEE NOTE	TITLE:	PART NO.: SS-14D01		
5	CONTACT CLIP	PBS STRIP	1	Ag PLATED			SLIDE SWITCH / VERTICAL			
4	TERMINAL	BRASS STRIP	6	Ag PLATED			DR:	DWG NO.: ADL-14D01		
3	BASE	PHENOLIC RESIN	1	NATURAL			<i>Ricky</i> 2015/05/26			
2	FRAME	STEEL STRIP	1	Ni PLATED			CHKD:	SCALE SHEET REV. CUSTOMER 4:1 1/1 A DRAWING		
1	KNOB	POM	1	BLACK			<i>Ricky</i> 2015/05/26			
NO.	PARTS	MATERIAL	Q'TY	FINISHING			APPD:			

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

