

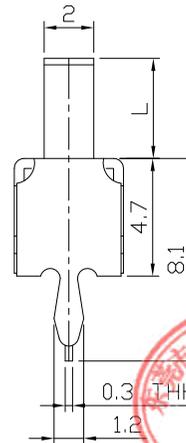
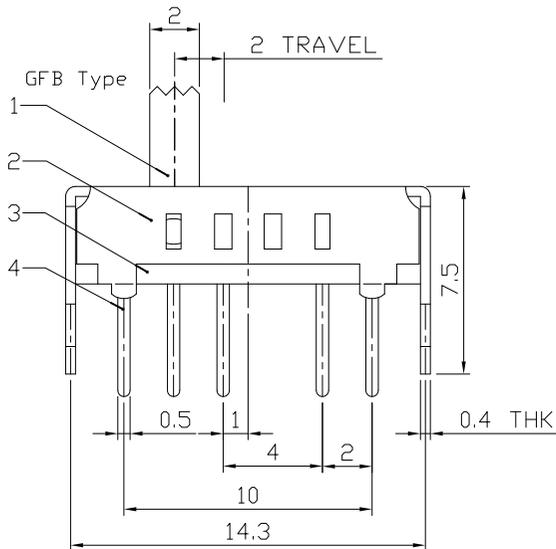






RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

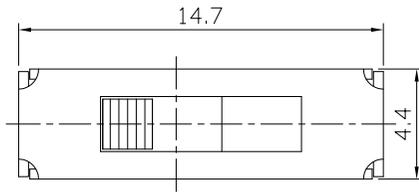

MODEL CODE

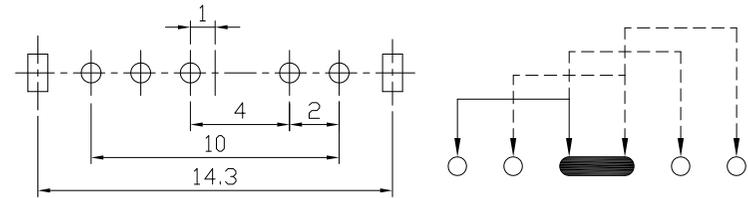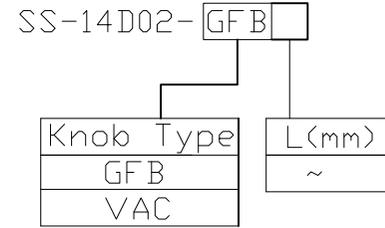

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000



8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	东莞市铀高电子制品有限公司							
7					OVER 1.5mm: ±0.2mm	MAT'L									
6	SPRING PLATED	PBS STRIP	1	NATURAL		SEE NOTE		TITLE:	SLIDE SWITCH / VERTICAL			PART NO.:	SS-14D02		
5	CONTACT CLIP	PBS STRIP	1	Ag PLATED				DR:	Ricky 2015/05/26			DWG NO.:	ADL-14D02		
4	TERMINAL	BRASS STRIP	5	Ag PLATED				CHKD:	Ricky 2015/05/26			SCALE	SHEET	REV.	CUSTOMER
3	BASE	PHENOLIC RESIN	1	NATURAL				APPD:				4:1	1/1	A	DRAWING
2	FRAME	STEEL STRIP	1	Ni PLATED											
1	KNOB	POM	1	BLACK											
NO.	PARTS	MATERIAL	Q'TY	FINISHING											

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.