

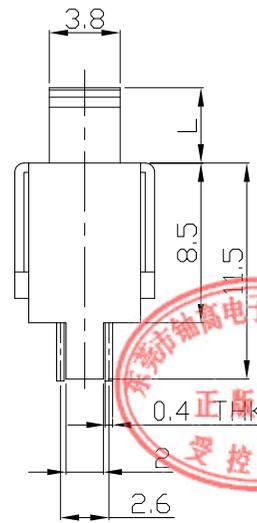


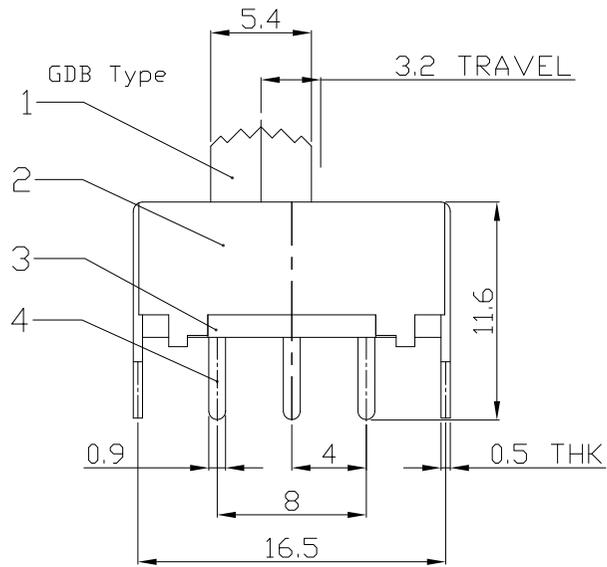



RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

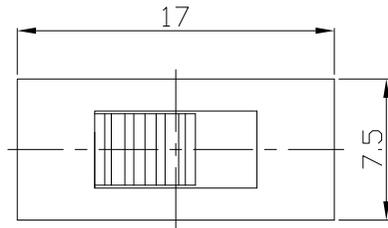

MODEL CODE

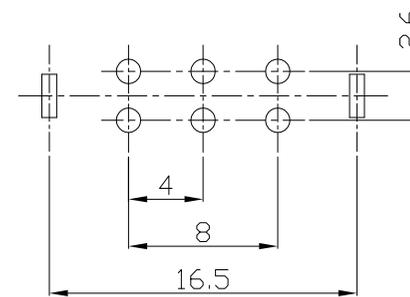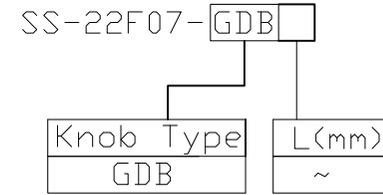

P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3.2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	东莞市铀高电子制品有限公司
7					OVER 1.5mm: ±0.2mm	MAT'L		
6	SPRING	STEEL WIRE	2	NATURAL		SEE NOTE		TITLE: SLIDE SWITCH / VERTICAL
5	CONTACT	BRASS STRIP	2	Ag PLATED				PART NO.: SS-22F07
4	TERMINAL	BRASS STRIP	6	Ag PLATED				DR: <i>Ricky</i> 2015/05/26
3	BASE	PHENOLIC RESIN	1	BLACK				DWG NO.: ADL-22F07
2	FRAME	STEEL STRIP	1	Ni PLATED				CHKD: <i>Ricky</i> 2015/05/26
1	KNOB	POM	1	BLACK				APPD:
NO.	PARTS	MATERIAL	Q'TY	FINISHING				SCALE SHEET REV. CUSTOMER 2:1 1/1 A DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

