



RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.





MODEL CODE

SS-22H01-GBF

Knob Type
GBF
VAI

L(mm)
~

DIMENSIONS

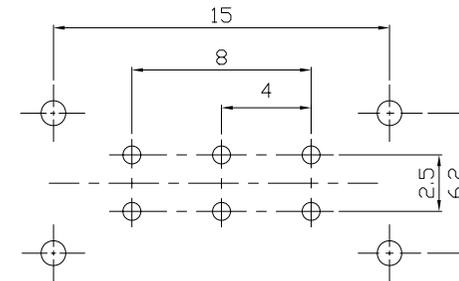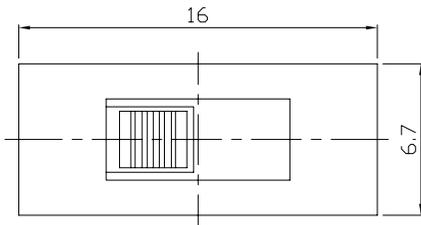



P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	4mm
OPERATING FORCE	200±100gf
OPERATING LIFE(cycles)	10,000

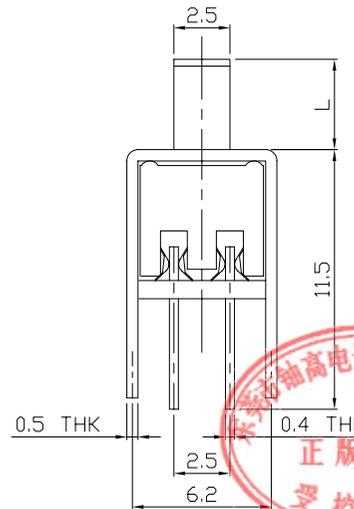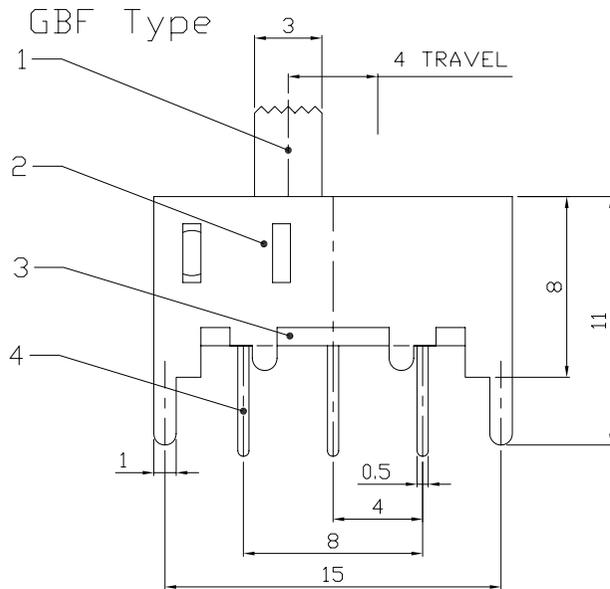

8							
7	STEEL BALL	STEEL	1	NATURAL	WITHIN 1.5mm: ±0.1mm	UNITS	mm
6	SPRING	STEEL WIRE	1	NATURAL	OVER 1.5mm: ±0.2mm	MAT'L	
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED		SEE NOTE	TITLE: SLIDE SWITCH / VERTICAL
4	TERMINAL	BRASS STRIP	6	Ag PLATED		FINISH	
3	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE	DR: <i>Ricky</i> 2015/09/02
2	FRAME	STEEL STRIP	1	Ni PLATED		Q'TY	CHKD: <i>Ricky</i> 2015/09/02
1	KNOB	POM	1	BLACK			APPD:
NO.	PARTS	MATERIAL	Q'TY	FINISHING			SCALE
							3:1
							SHEET
							1/1
							REV.
							A
							CUSTOMER
							DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.



东莞市铀高电子制品有限公司

TITLE:
SLIDE SWITCH / VERTICAL

PART NO.:
SS-22H01

DR: *Ricky* 2015/09/02

DWG NO.:
ADL-22H01

CHKD: *Ricky* 2015/09/02

APPD:

SCALE SHEET REV. CUSTOMER
3:1 1/1 A DRAWING