





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.



MODEL CODE

SS-22H04-GBF

DIMENSIONS

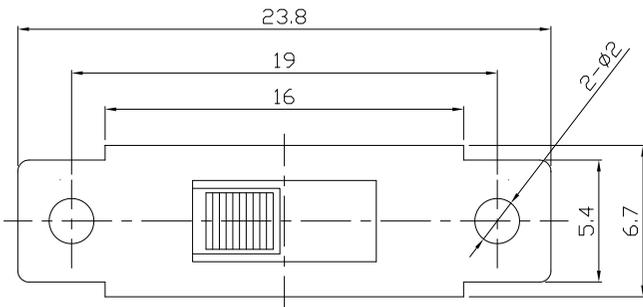

Knob Type	L(mm)
GBF	~
VAI	

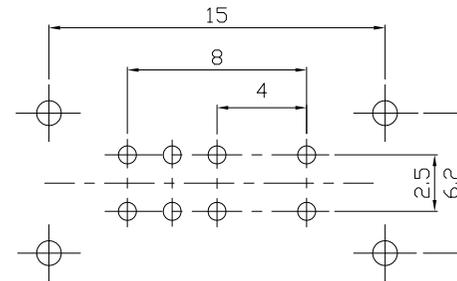

P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	4mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

GBF Type

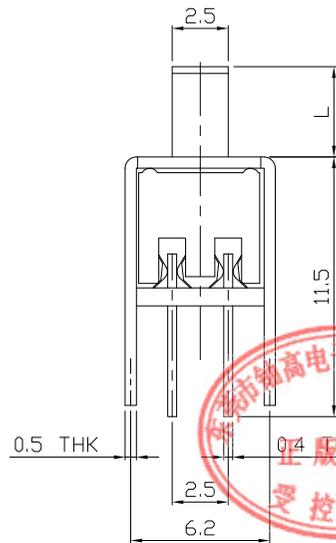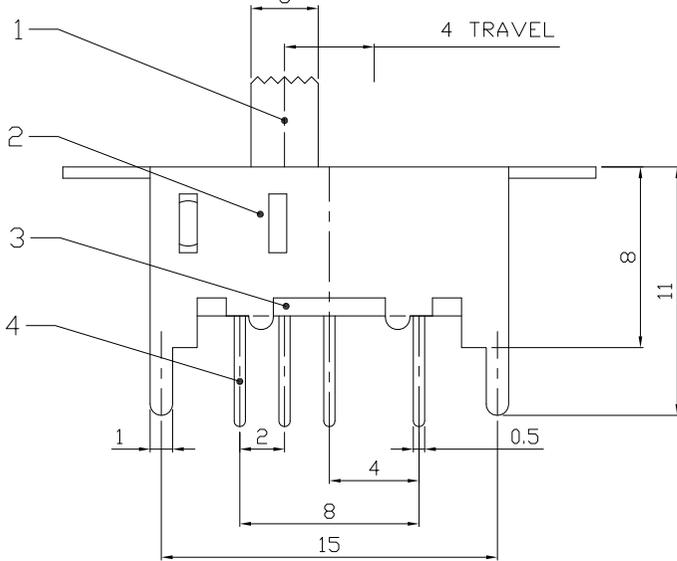

8					
7	STEEL BALL	STEEL	2	NATURAL	WITHIN 1.5mm: ±0.1mm
6	SPRING	STEEL WIRE	1	NATURAL	OVER 1.5mm: ±0.2mm
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED	
4	TERMINAL	BRASS STRIP	6	Ag PLATED	
3	BASE	PHENOLIC RESIN	1	NATURAL	
2	FRAME	STEEL STRIP	1	Ni PLATED	
1	KNOB	POM	1	BLACK	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.

UNITS	mm	东莞市铀高电子制品有限公司					
MAT'L	SEE NOTE						
FINISH	SEE NOTE	TITLE:	SLIDE SWITCH / VERTICAL				
Q'TY	SEE NOTE	PART NO.:	SS-22H04				
		DR:	Ricky 2015/09/03		DWG NO.:	ADL-22H04	
		CHKD:	Ricky 2015/09/03		SCALE	SHEET	REV.
		APPD:	3:1	1/1	A	CUSTOMER DRAWING	