



RoHS
Compliant
2002/95/EC

MODEL CODE





SS-22H05- GBF

Knob Type
GBF
VAI

L(mm)
~



REV.	ECN.	NO.	APPD.

DIMENSIONS

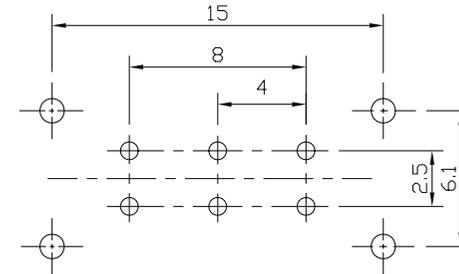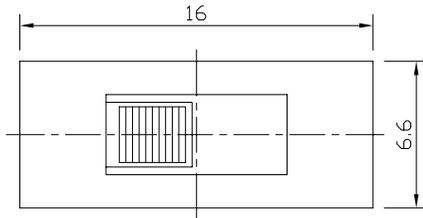

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

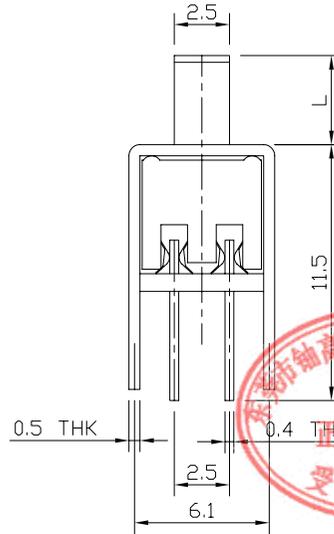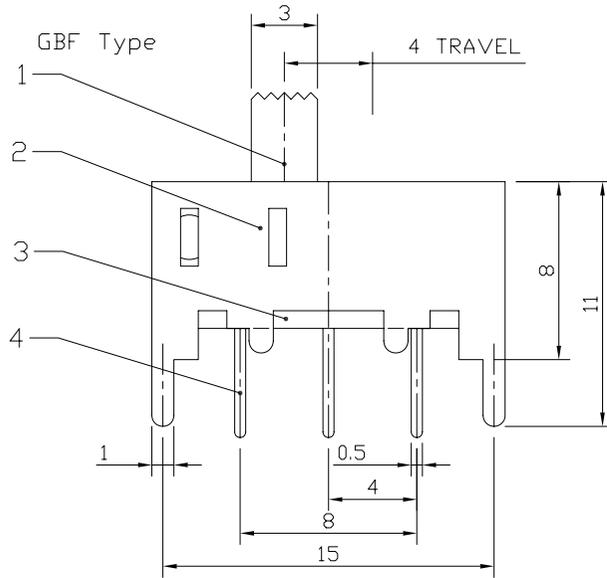

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	4mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000



8						WITHIN 1.5mm: ±0.1mm	UNITS	mm	东莞市铀高电子制品有限公司	
7	STEEL BALL	STEEL	1	NATURAL		OVER 1.5mm: ±0.2mm	MAT'L			
6	SPRING	STEEL WIRE	1	NATURAL			SEE NOTE	TITLE: SLIDE SWITCH / VERTICAL		PART NO.:
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED			FINISH	DR: <i>Ricky</i> 2015/05/28		SS-22H05
4	TERMINAL	BRASS STRIP	6	Ag PLATED			SEE NOTE	CHKD: <i>Ricky</i> 2015/05/28		DWG NO.:
3	BASE	PHENOLIC RESIN	1	NATURAL			Q'TY	APPD:		ADL-22H05
2	FRAME	STEEL STRIP	1	Ni PLATED				SCALE		3:1
1	KNOB	POM	1	BLACK				SHEET		1/1
NO.	PARTS	MATERIAL	Q'TY	FINISHING				REV.	A	
								CUSTOMER	DRAWING	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.

