




RoHS  
Compliant  
2002/95/EC

REV.	ECN. NO.	APPD.


### DIMENSIONS

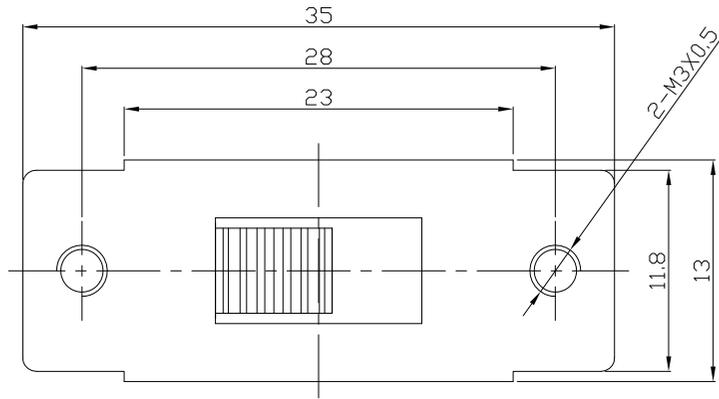


### MODEL CODE

SS-22K29-GHA

Knob Type	L(mm)
GHA	~

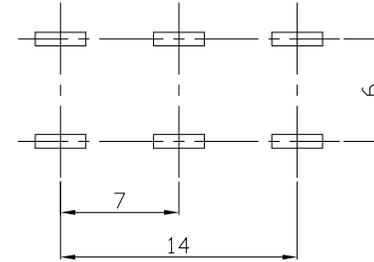

P.C.B LAYOUT  
BOTTOM VIEW





CIRCUIT DIAGRAM

### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	5.4mm
OPERATING FORCE	300±100gf
OPERATING LIFE(cycles)	10,000

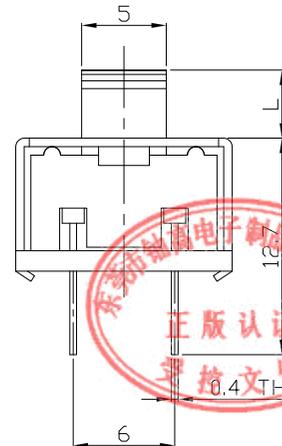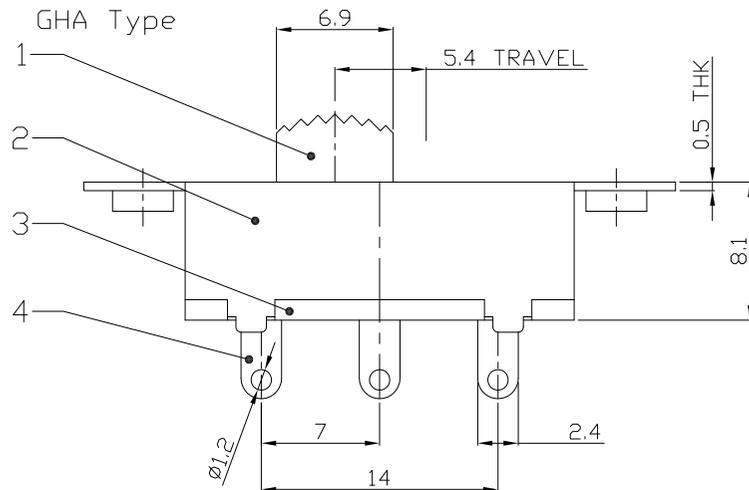

NO.	PARTS	MATERIAL	Q'TY	FINISHING	WITHIN 1.5mm: ±0.1mm	OVER 1.5mm: ±0.2mm	UNITS	东莞市铀高电子制品有限公司			
8							mm	TITLE: SLIDE SWITCH / VERTICAL			
7							MAT'L				
6	CONTACT CLIP	BRASS STRIP	2	Ag PLATED			SEE NOTE	DR: Ricky 2015/09/04			
5	SPRING	STEEL WIRE	2	NATURAL			SEE NOTE				
4	TERMINAL	BRASS STRIP	6	Ag PLATED			FINISH	CHKD: Ricky 2015/09/04			
3	BASE	PHENOLIC RESIN	1	NATURAL			SEE NOTE				
2	FRAME	STEEL STRIP	1	Ni PLATED			Q'TY	APPD:			
1	KNOB	POM	1	BLACK							