







RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

MODEL CODE


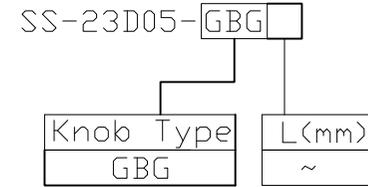


DIMENSIONS

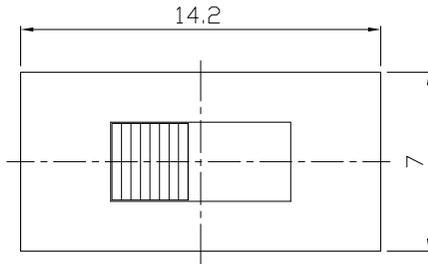

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

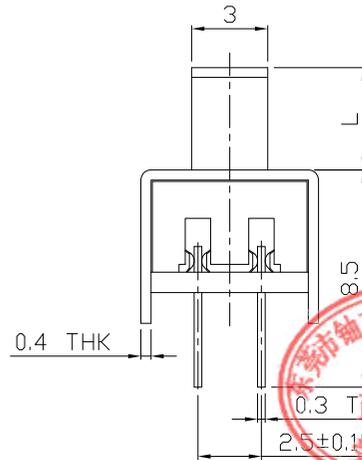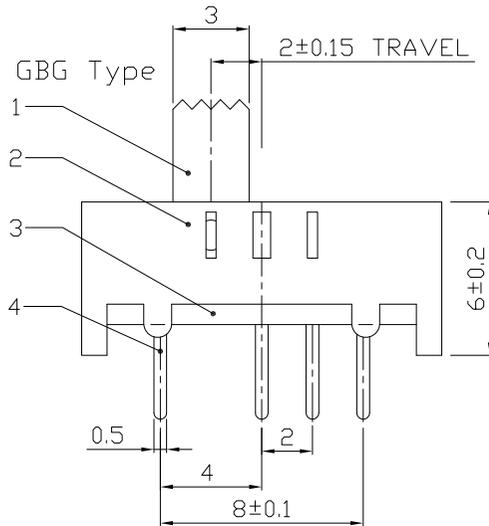

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2±0.15mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000



8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	东莞市铀高电子制品有限公司
7					OVER 1.5mm: ±0.2mm	MAT'L		
6	SPRING WIRE	PBS STRIP	2	NATURAL		SEE NOTE		TITLE:
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED				SLIDE SWITCH / VERTICAL
4	TERMINAL	BRASS STRIP	8	Ag PLATED				SS-23D05
3	BASE	PHENOLIC RESIN	1	NATURAL		FINISH		DR: Ricky 2015/09/07
2	FRAME	STEEL STRIP	1	Ni PLATED		SEE NOTE		DWG NO.:
1	KNOB	POM	1	BLACK		Q'TY		ADL-23D05
NO.	PARTS	MATERIAL	Q'TY	FINISHING				SCALE
								4:1
								SHEET
								1/1
								REV.
								A
								CUSTOMER
								DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

