





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

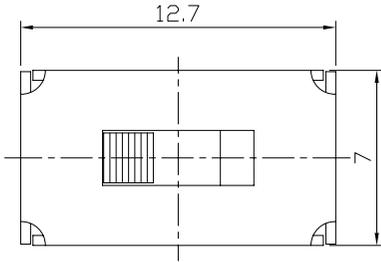


MODEL CODE


SS-23D06-GEE

Knob Type
GEE
VAC



L(mm)
~

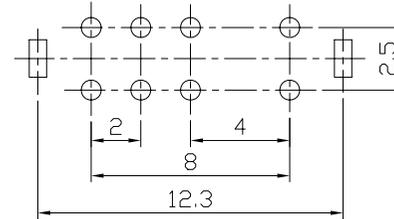

P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

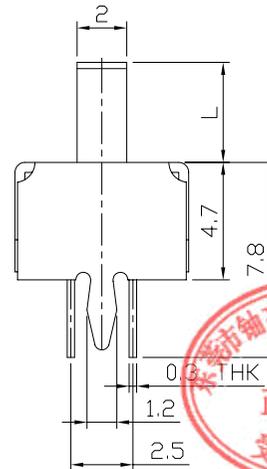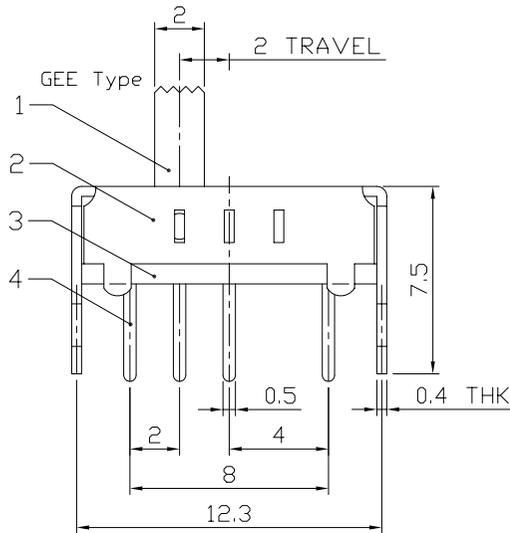

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000



8					
7					WITHIN 1.5mm: ±0.1mm
6	SPRING PLATED	PBS STRIP	1	NATURAL	OVER 1.5mm: ±0.2mm
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED	
4	TERMINAL	BRASS STRIP	8	Ag PLATED	
3	BASE	PHENOLIC RESIN	1	NATURAL	
2	FRAME	STEEL STRIP	1	Ni PLATED	
1	KNOB	POM	1	BLACK	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	mm	东莞市铀高电子制品有限公司				
MAT'L	SEE NOTE					
FINISH	SEE NOTE	TITLE:	SLIDE SWITCH / VERTICAL			
Q'TY	SEE NOTE	PART NO.:	SS-23D06			
		DR:	Ricky 2015/05/28		DWG NO.:	ADL-23D06
		CHKD:	Ricky 2015/05/28		SCALE	7:2
		APPD:	SHEET	1/1	REV.	A
			CUSTOMER	DRAWING		