







RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.


### DIMENSIONS

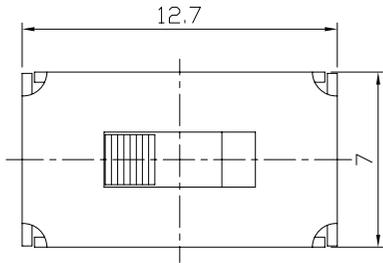



### MODEL CODE

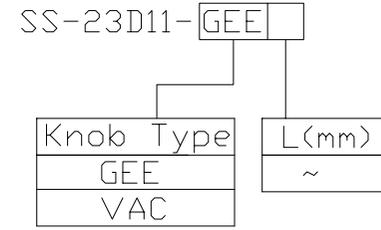

P.C.B LAYOUT  
BOTTOM VIEW



CIRCUIT DIAGRAM

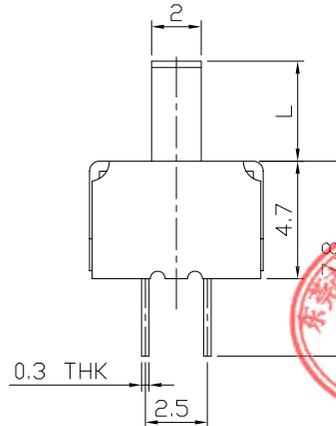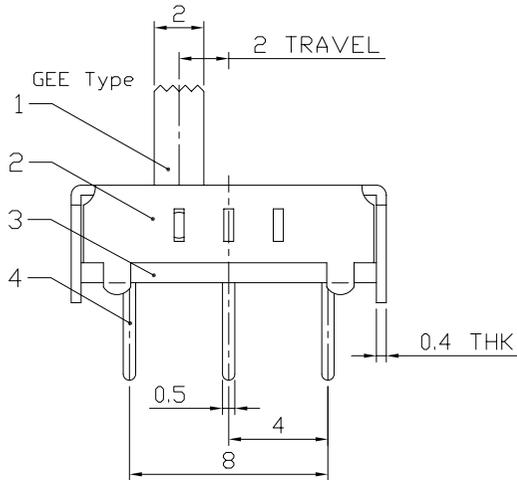

### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000



8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	<b>东莞市铀高电子制品有限公司</b>			
7					OVER 1.5mm: ±0.2mm	MAT'L					
6	SPRING PLATED	PBS STRIP	1	NATURAL		SEE NOTE	TITLE:	SLIDE SWITCH / VERTICAL			
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED			PART NO.:				
4	TERMINAL	BRASS STRIP	6	Ag PLATED			DR:	2015/05/28			
3	BASE	PHENOLIC RESIN	1	NATURAL			DWG NO.:				
2	FRAME	STEEL STRIP	1	Ni PLATED			CHKD:	2015/05/28			
1	KNOB	POM	1	BLACK			APPD:				
NO.	PARTS	MATERIAL	Q'TY	FINISHING				CUSTOMER DRAWING			

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

