






RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

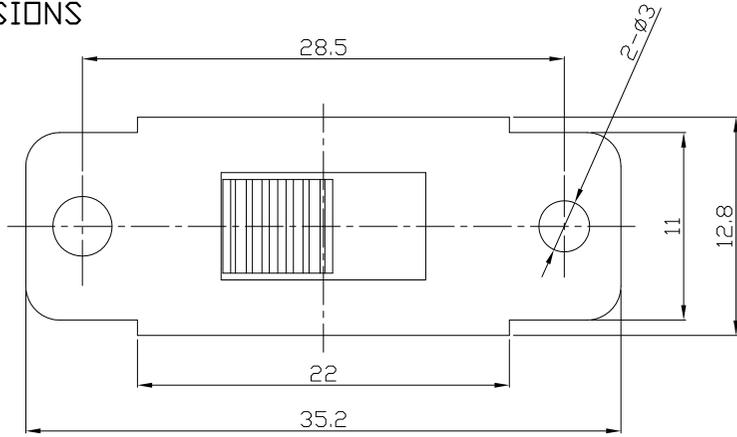

MODEL CODE

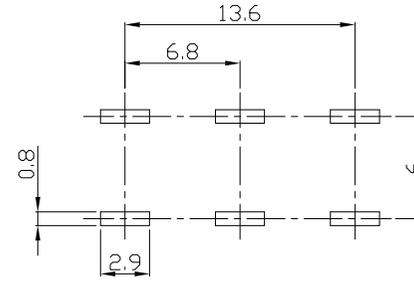
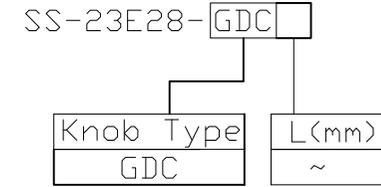


P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

GDC Type

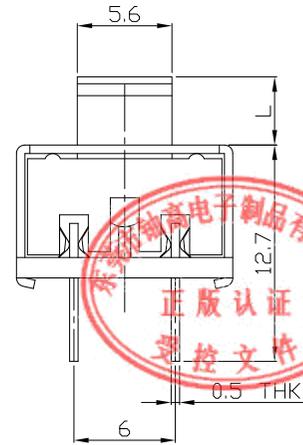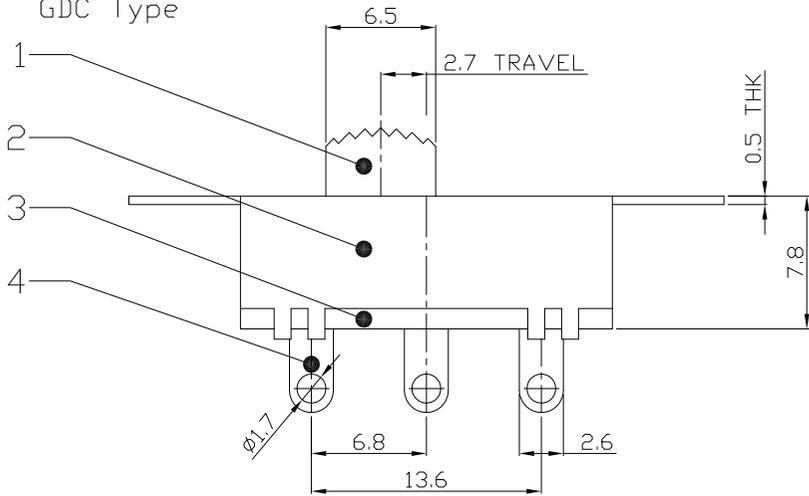

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	1.5A 250V AC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2.7mm
OPERATING FORCE	400±100gf
OPERATING LIFE(cycles)	10,000

8	CONTACT CLIP	PBS STRIP	2	Ag PLATED	WITHIN 1.5mm: ±0.1mm
7	POSITION PLATE	STEEL STRIP	1	Ni PLATED	OVER 1.5mm: ±0.2mm
6	STEEL BALL	STEEL	1	NATURAL	
5	SPRING	STEEL WIRE	1	NATURAL	
4	TERMINAL	BRASS STRIP	6	Ag PLATED	
3	BASE	PHENOLIC RESIN	1	NATURAL	
2	FRAME	STEEL STRIP	1	Ni PLATED	
1	KNOB	POM	1	BLACK	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

UNITS	mm	东莞市铀高电子制品有限公司				
MAT'L	SEE NOTE					
FINISH	SEE NOTE	TITLE:	SLIDE SWITCH / VERTICAL			
Q'TY	SEE NOTE	DR:	Ricky 2015/09/08		PART NO.:	SS-23E28
		CHKD:	Ricky 2015/09/08		DWG NO.:	ADL-23E28
		APPD:	SCALE	SHEET	REV.	CUSTOMER DRAWING
			2:1	1/1	A	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

