









RoHS
Compliant
2002/95/EC

| REV. | ECN. | NO. | APPD. |
|------|------|-----|-------|
| | | | |
| | | | |

MODEL CODE

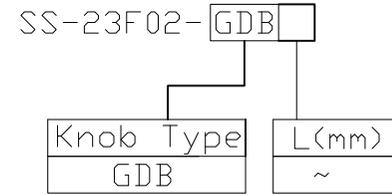

DIMENSIONS

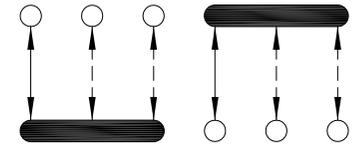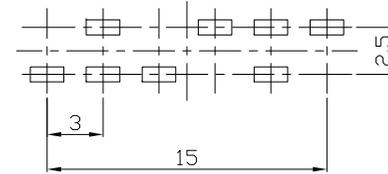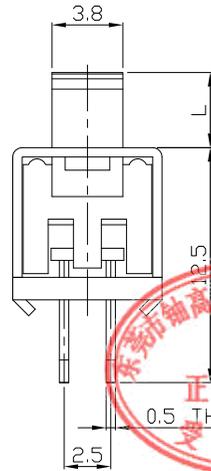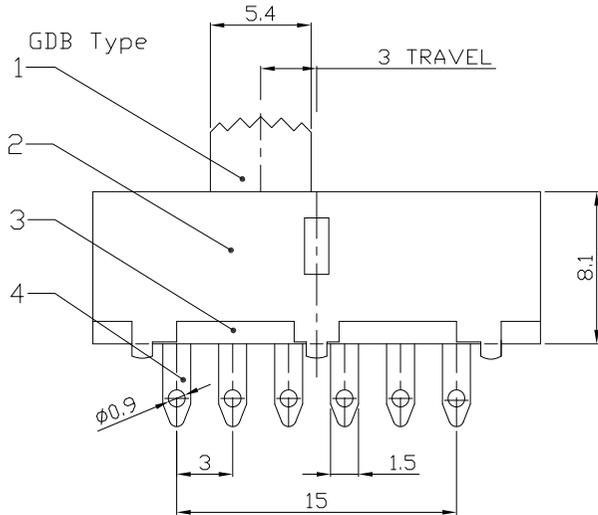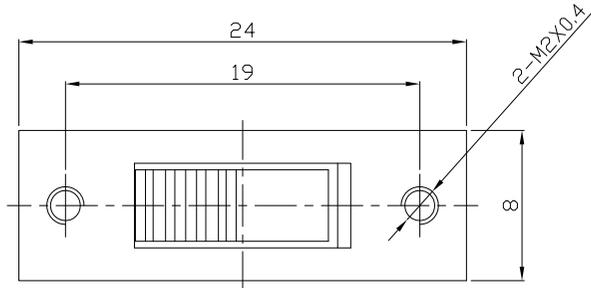

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

| | |
|------------------------|-------------|
| RATING | 0.3A 50V DC |
| CIRCUIT | 2P3T |
| CONTACT RESISTANCE | 100mΩ MAX. |
| TIMING | SHORTING |
| TRAVEL | 3mm |
| OPERATING FORCE | 250±100gf |
| OPERATING LIFE(cycles) | 10,000 |



| | | | | | |
|-----|------------|----------------|------|-----------|----------------------|
| 8 | | | | | |
| 7 | STEEL BALL | STEEL | 2 | NATURAL | WITHIN 1.5mm: ±0.1mm |
| 6 | SPRING | STEEL WIRE | 3 | NATURAL | OVER 1.5mm: ±0.2mm |
| 5 | CONTACT | BRASS STRIP | 2 | Ag PLATED | |
| 4 | TERMINAL | BRASS STRIP | 8 | Ag PLATED | |
| 3 | BASE | PHENOLIC RESIN | 1 | NATURAL | |
| 2 | FRAME | STEEL STRIP | 1 | BLACK | |
| 1 | KNOB | POM | 1 | BLACK | |
| NO. | PARTS | MATERIAL | Q'TY | FINISHING | |

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

| | | | | | |
|--------|----------|-------------------------|------------------|-------|------|
| UNITS | mm | 东莞市铀高电子制品有限公司 | | | |
| MAT'L | SEE NOTE | | | | |
| FINISH | SEE NOTE | TITLE: | PART NO.: | | |
| Q'TY | SEE NOTE | SLIDE SWITCH / VERTICAL | SS-23F02 | | |
| | | DR: Ricky 2015/05/29 | DWG NO.: | | |
| | | CHKD: Ricky 2015/05/29 | ADL-23F02 | | |
| | | APPD: | SCALE | SHEET | REV. |
| | | | 5:2 | 1/1 | A |
| | | | CUSTOMER DRAWING | | |