




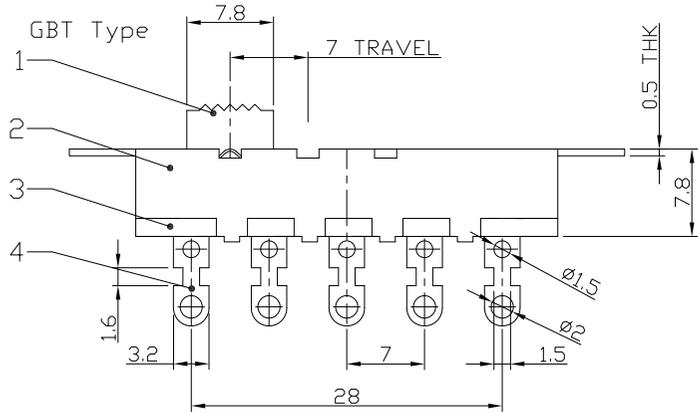



RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

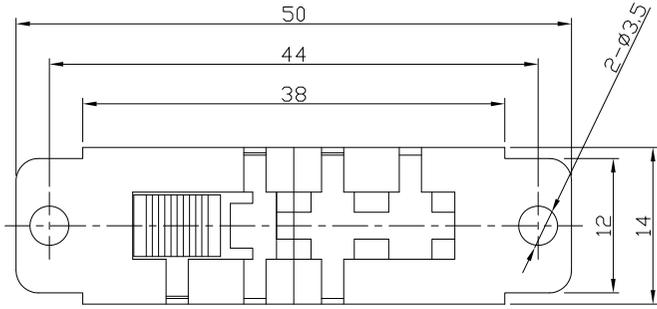

MODEL CODE

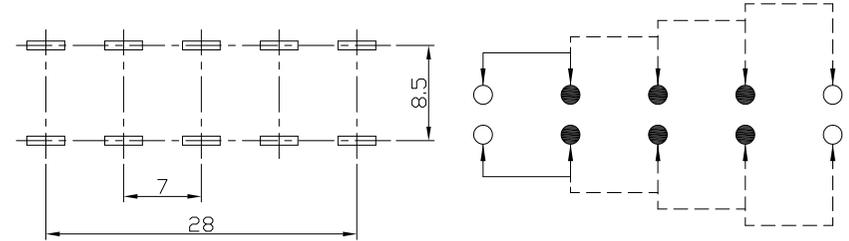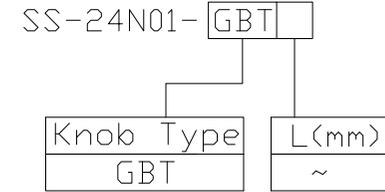

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	3A 250V AC
CIRCUIT	2P4T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	7mm
OPERATING FORCE	600±200gf
OPERATING LIFE(cycles)	10,000



NO.	PARTS	MATERIAL	Q'TY	FINISHING
8				
7	SPRING PLATE	PBS STRIP	1	NATURAL
6	CONTACT	COPPER STRIP	2	Ag PLATED
5	SPRING PLATE	PBS STRIP	2	NATURAL
4	TERMINAL	BRASS STRIP	10	Ag PLATED
3	BASE	PHENOLIC RESIN	1	BLACK
2	FRAME	STEEL STRIP	1	Zn PLATED
1	KNOB	PA66	1	BLACK

WITHIN 1.5mm: ±0.1mm
OVER 1.5mm: ±0.2mm

UNITS mm

MAT'L SEE NOTE

FINISH SEE NOTE

Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

东莞市铀高电子制品有限公司				
TITLE: SLIDE SWITCH / VERTICAL		PART NO. SS-24N01		
DR: Ricky 2015/05/29		DWG NO.: ADL-24N01		
CHKD: Ricky 2015/05/29		SCALE	SHEET	REV.
APPD:		3:2	1/1	A
		CUSTOMER DRAWING		