






RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.



DIMENSIONS

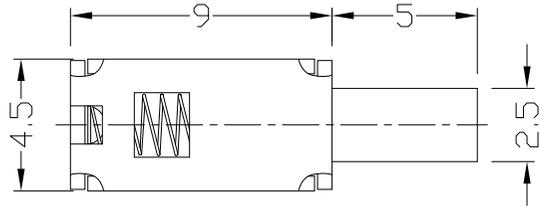

P.C.B LAYOUT
BOTTOM VIEW




CIRCUIT DIAGRAM

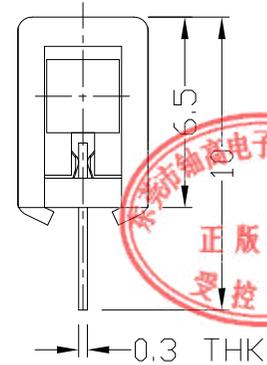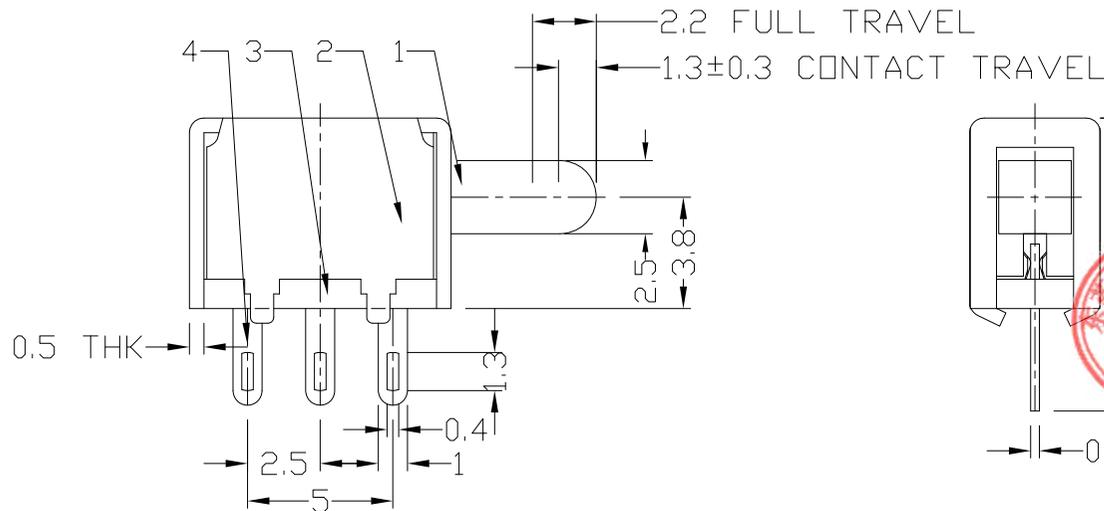

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC50V 0.3A	
CIRCUIT	1P2T	
CONTACT RESISTANCE	100mΩ MAX.	
TIMING	NON-SHORTING	
OPERATING MODE	NON-LOCK	
STROKE	FULL 2.2mm	CONTACT 1.3±0.3
OPERATING FORCE	70±20gf	
OPERATING LIFE(cycles)	10,000	



8					WITHIN 1.5mm±0.1mm	UNITS mm
7					OVER 1.5mm±0.2mm	MAT'L
6	SPRING	STEEL WIRE	1	NATURAL		SEE NOTE
5	CONTACT CLIP	PBS STRIP	1	Ag PLATED		SEE NOTE
4	TERMINAL	BRASS STRIP	3	Ag PLATED		FINISH
3	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE
2	FRAME	STEEL STRIP	1	Ni PLATED		Q'TY
1	KNOB	POM	1	BLACK		
NO.	PARTS	MATERIAL	Q'TY	FINISHING		

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

东莞市铀高电子制品有限公司			
TITLE:	PUSH SWITCH / HORIZONTAL	PART NO.:	AP-12D01N
DR:	Ricky 2015/03/30	DWG NO.:	ADL-12D01
CHKD:	Ricky 2015/03/30	SCALE	4:1
APPD:		SHEET	1/1
		REV.	A
		CUSTOMER DRAWING	