






RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.



### DIMENSIONS

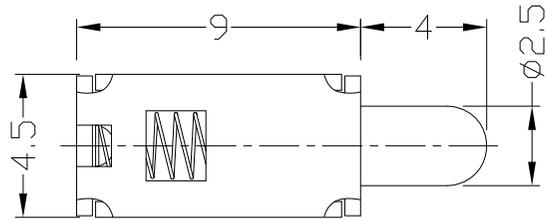

P.C.B LAYOUT  
BOTTOM VIEW



CIRCUIT DIAGRAM

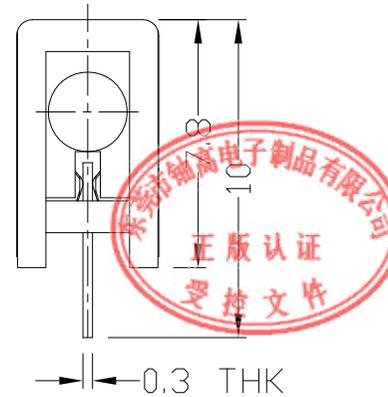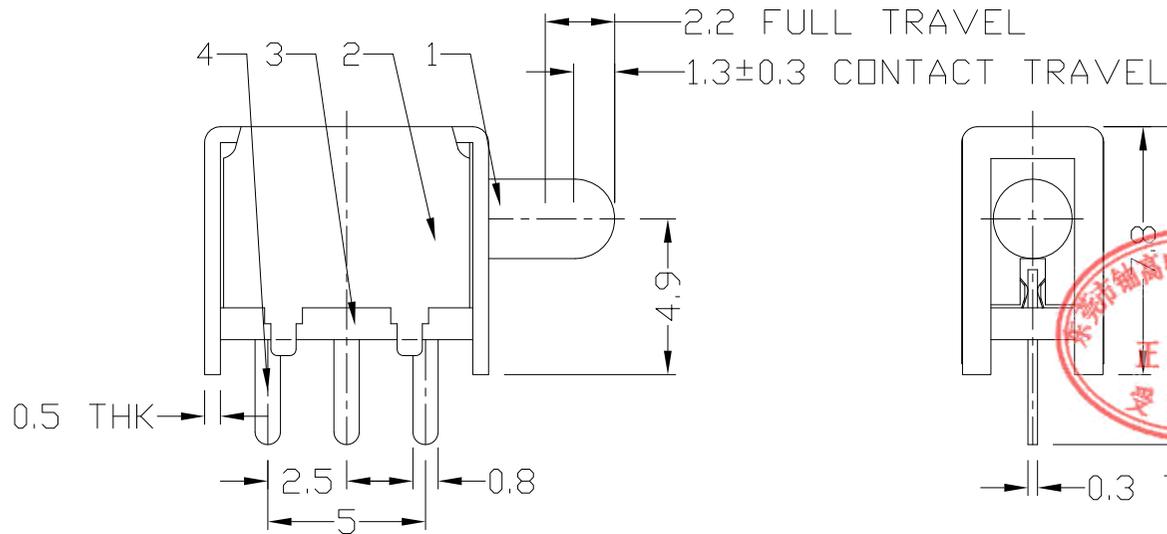

### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC50V 0.3A	
CIRCUIT	1P2T	
CONTACT RESISTANCE	100mΩ MAX.	
TIMING	NON-SHORTING	
OPERATING MODE	NON-LOCK	
STROKE	FULL 2.2mm	CONTACT 1.3±0.3
OPERATING FORCE	70±20gf	
OPERATING LIFE(cycles)	10,000	

8					
7					WITHIN 1.5mm±0.1mm
6	SPRING	STEEL WIRE	1	NATURAL	OVER 1.5mm±0.2mm
5	CONTACT CLIP	PBS STRIP	1	Ag PLATED	
4	TERMINAL	BRASS STRIP	3	Ag PLATED	
3	BASE	PHENOLIC RESIN	1	NATURAL	
2	FRAME	STEEL STRIP	1	Ni PLATED	
1	KNOB	POM	1	BLACK	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	mm
MAT'L	SEE NOTE
FINISH	SEE NOTE
Q'TY	

<b>东莞市铀高电子制品有限公司</b>			
TITLE:	PUSH SWITCH / HORIZONTAL	PART NO.:	AP-12D33N
DR:	Ricky 2015/03/30	DWG NO.:	ADL-12D33
CHKD:	Ricky 2015/03/30	SCALE	4:1
APPD:		SHEET	1/1
		REV.	A
		CUSTOMER DRAWING	