

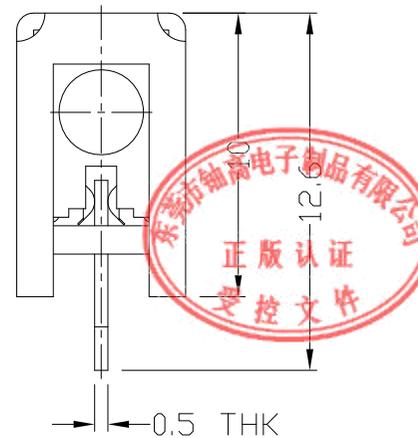
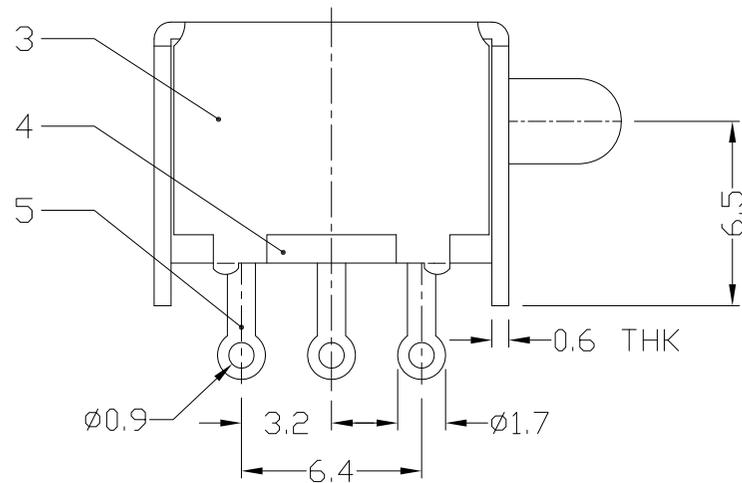





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

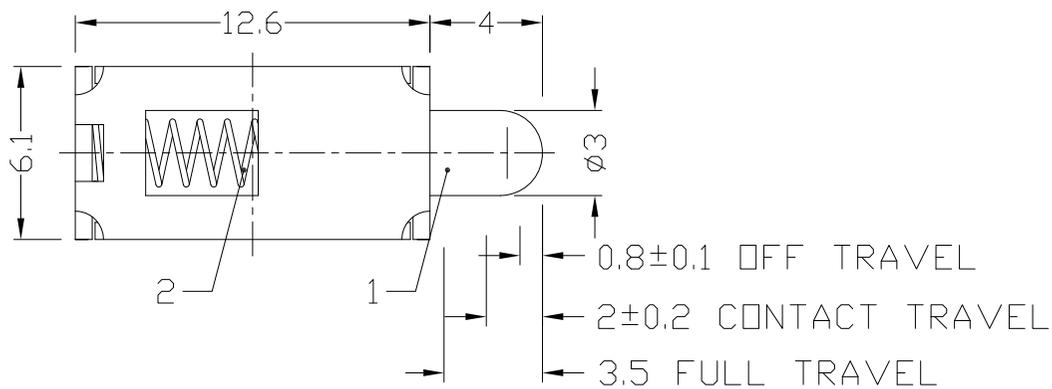

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC50V 0.3A
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
OPERATING MODE	NON-LOCK
STROKE	OFF 0.8±0.1 FULL 3.5mm CONTACT 2±0.2
OPERATING FORCE	70±20gf
OPERATING LIFE(cycles)	10,000

8					
7					WITHIN 1.5mm±0.1mm
6	CONTACT CLIP	PBS STRIP	1	Ag PLATED	OVER 1.5mm±0.2mm
5	TERMINAL	BRASS STRIP	3	Ag PLATED	
4	BASE	PHENDLIC RESIN	1	NATURAL	
3	FRAME	STEEL STRIP	1	Ni PLATED	
2	SPRING	STEEL WIRE	1	NATURAL	
1	KNOB	PDM	1	BLACK	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	mm	东莞市铀高电子制品有限公司			
MAT'L	SEE NOTE				
FINISH	SEE NOTE	TITLE:	PART NO.:		
Q'TY		PUSH SWITCH / HORIZONTAL	AP-12F03-A-N		
		DR: Ricky 2015/03/30	DWG NO.:		
		CHKD: Ricky 2015/03/30	ADL-12F03-A		
		APPD:	SCALE	SHEET	REV.
			3:1	1/1	A
					CUSTOMER DRAWING