

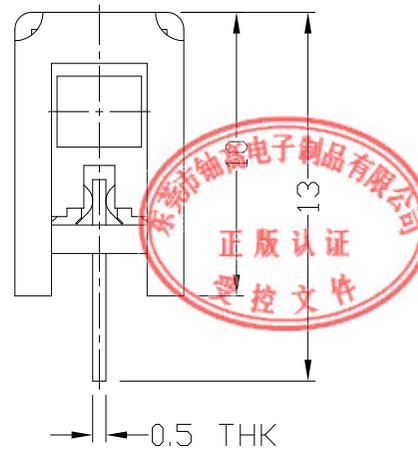
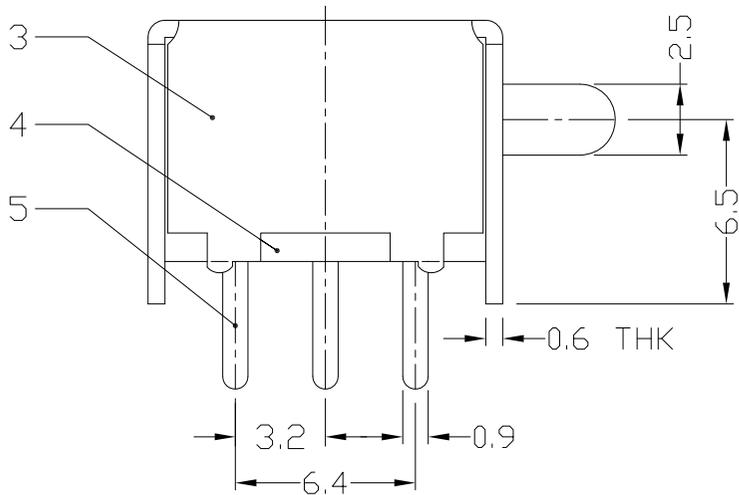





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

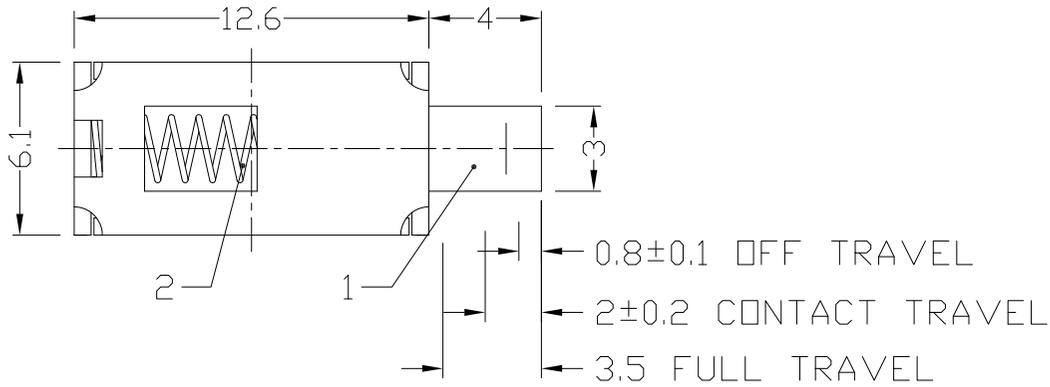

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC50V 0.3A
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
OPERATING MODE	NON-LOCK
STROKE	OFF 0.8 ± 0.1 FULL 3.5mm CONTACT 2 ± 0.2
OPERATING FORCE	70±20gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm±0.1mm	UNITS mm	东莞市铀高电子制品有限公司			
7					OVER 1.5mm±0.2mm	MAT'L				
6	CONTACT CLIP	PBS STRIP	1	Ag PLATED		SEE NOTE	TITLE:	PART NO.		
5	TERMINAL	BRASS STRIP	3	Ag PLATED			PUSH SWITCH / HORIZONTAL	AP-12F03N		
4	BASE	PHENDLIC RESIN	1	NATURAL			DR:	Ricky 2015/03/30		DWG NO.:
3	FRAME	STEEL STRIP	1	Ni PLATED			CHKD:	Ricky 2015/03/30		ADL-12F03
2	SPRING	STEEL WIRE	1	NATURAL			APPD:	SCALE	SHEET	REV.
1	KNOB	PDM	1	BLACK				3:1	1/1	A
NO.	PARTS	MATERIAL	Q'TY	FINISHING						CUSTOMER DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.