


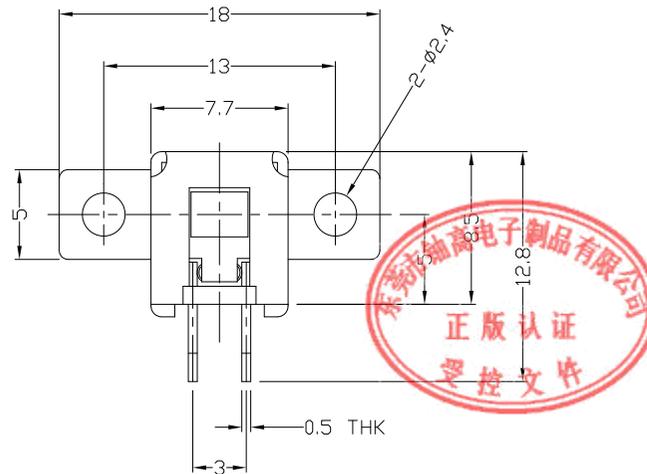


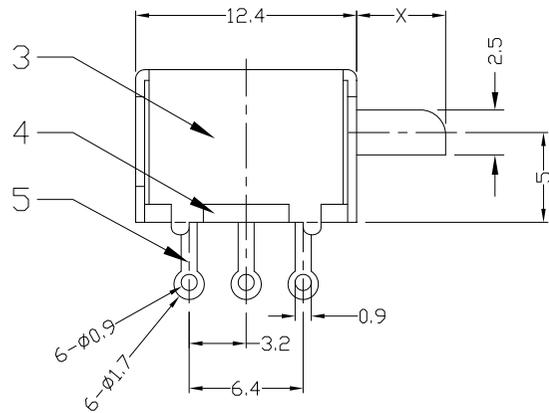


RoHS  
Compliant  
2002/95/EC

REV.	ECN. NO.	APPD.

### DIMENSIONS

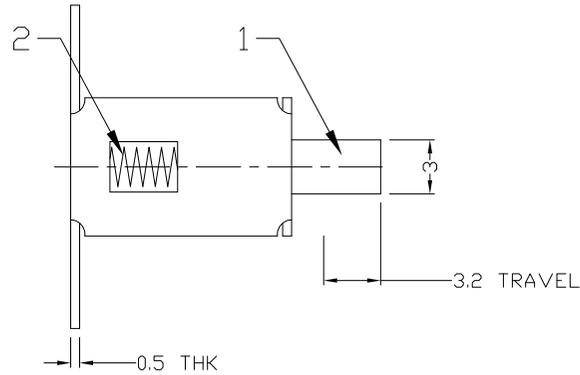

P.C.B LAYOUT  
BOTTOM VIEW




CIRCUIT DIAGRAM

### ELECTRO-MECHANICAL CHARACTERISTICS


Refer to additional specifications

RATING	DC50V 0.3A
CIRCUIT	2P2T
CONTACT RESISTANCE	100m $\Omega$ MAX.
TIMING	NON-SHORTING
OPERATING MODE	NON-LOCK
STROKE	FULL 3.2mm
OPERATING FORCE	100 $\pm$ 30gf
OPERATING LIFE(cycles)	10,000



8					WITHIN 1.5mm $\pm$ 0.1mm	UNITS mm
7					OVER 1.5mm $\pm$ 0.2mm	MAT'L
6	CONTACT CLIP	PBS STRIP	2	Ag PLATED		SEE NOTE
5	TERMINAL	BRASS STRIP	6	Ag PLATED		SEE NOTE
4	BASE	PHENDLIC RESIN	1	NATURAL		FINISH
3	FRAME	STEEL STRIP	1	Ni PLATED		SEE NOTE
2	SPRING	STEEL WIRE	1	NATURAL		Q'TY
1	KNOB	PDM	1	BLACK		
NO.	PARTS	MATERIAL	Q'TY	FINISHING		

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.



东莞市铀高电子制品有限公司

TITLE:	PUSH SWITCH / HORIZONTAL	PART NO.:	AP-22F14N
DR:	Ricky 2015/03/31	DWG NO.:	ADL-22F14
CHKD:	Ricky 2015/03/31	SCALE	2:1
APPD:		SHEET	1/1
		REV.	A
		CUSTOMER DRAWING	