






RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.



DIMENSIONS

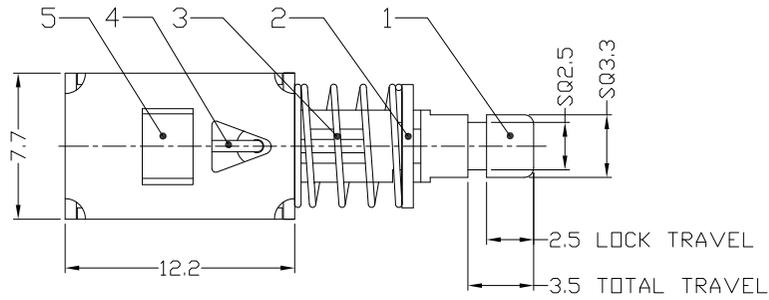

P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

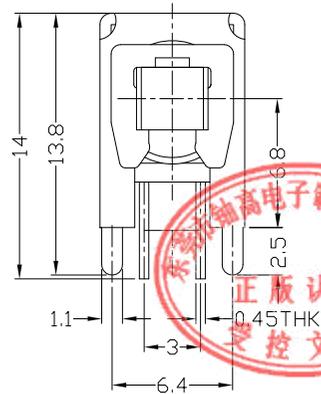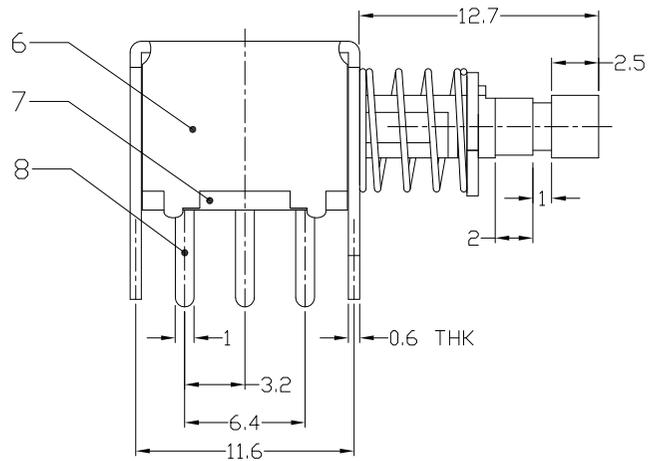

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC50V 0.3A
CIRCUIT	2P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	NON-SHORTING
OPERATING MODE	SELF-LOCK
STROKE	FULL 3.5mm LOCK 2.5mm
OPERATING FORCE	300±100gf
OPERATING LIFE(cycles)	10,000

9	CONTACT CLIP	PBS STRIP	2	Ag CLAD	WITHIN 1.5mm: ±0.1mm
8	TERMINAL	BRASS STRIP	6	Ag PLATED OVER Ni PLATED	OVER 1.5mm: ±0.2mm
7	BASE	PHENOLIC RESIN	1	NATURAL	
6	FRAME	STEEL STRIP	1	Ni PLATED OVER Cu PLATED	
5	SPRING PLATE	PBS STRIP	1	NATURAL	
4	CAM STICK	PBS WIRE	1	NATURAL	
3	SPRING	STEEL WIRE	1	Ni PLATED	
2	BLOCK	STEEL STRIP	1	Ni PLATED OVER Cu PLATED	
1	KNDB	NYLON+94V0+F.G	1	BLACK	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	mm
MAT'L	SEE NOTE
FINISH	SEE NOTE
Q'TY	

东莞市铀高电子制品有限公司			
TITLE: PUSH SWITCH / HORIZONTAL		PART NO.: AP-22F85L	
DR: <i>Ricky</i> 2015/03/27		DWG NO.: ADJ-22F85	
CHKD: <i>Ricky</i> 2015/03/27		SCALE	SHEET
APPD:		5:2	1/1
		REV.	CUSTOMER DRAWING
		A	

