


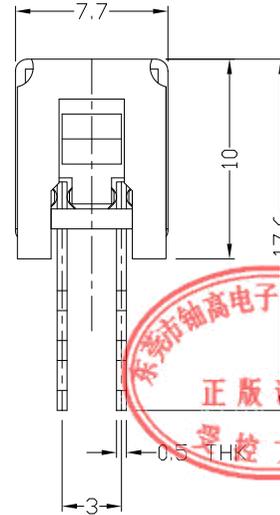


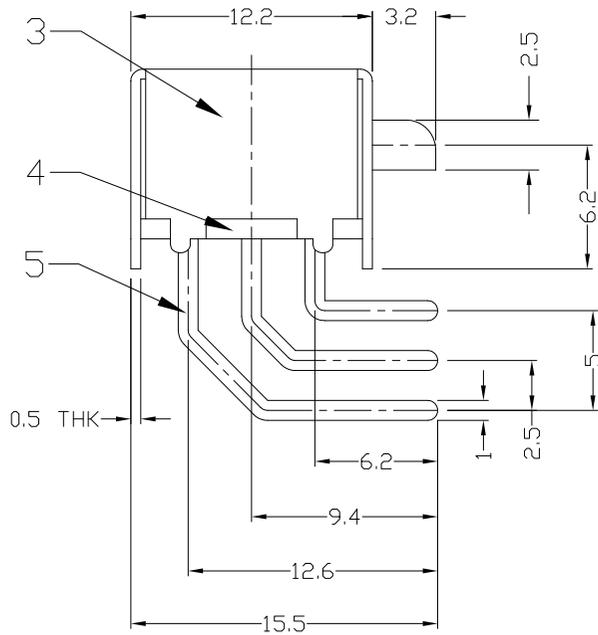


RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

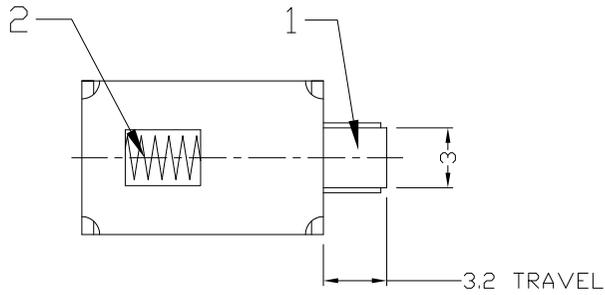

P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC50V 0.3A
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
OPERATING MODE	NON-LOCK
STROKE	FULL 3.2mm
OPERATING FORCE	70±20gf
OPERATING LIFE(cycles)	10,000



NO.	PARTS	MATERIAL	Q'TY	FINISHING
8				
7				WITHIN 1.5mm±0.1mm
6	CONTACT CLIP	PBS STRIP	2	Ag CLAD
5	TERMINAL	BRASS STRIP	6	Ag PLATED
4	BASE	PHENDLIC RESIN	1	NATURAL
3	FRAME	STEEL STRIP	1	Ni PLATED
2	SPRING	STEEL WIRE	1	NATURAL
1	KNOB	POM	1	BLACK

UNITS mm
OVER 1.5mm±0.2mm
SEE NOTE
FINISH
SEE NOTE
Q'TY
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS mm				东莞市铀高电子制品有限公司			
MAT'L		SEE NOTE		TITLE:		PART NO.:	
FINISH		SEE NOTE		PUSH SWITCH / HORIZONTAL		AP-22F92N	
Q'TY		DR: Ricky 2015/04/02		DWG NO.:		ADL-22F92	
APPD:		CHKD: Ricky 2015/04/02		SCALE	SHEET	REV.	CUSTOMER DRAWING
				2:1	1/1	A	