


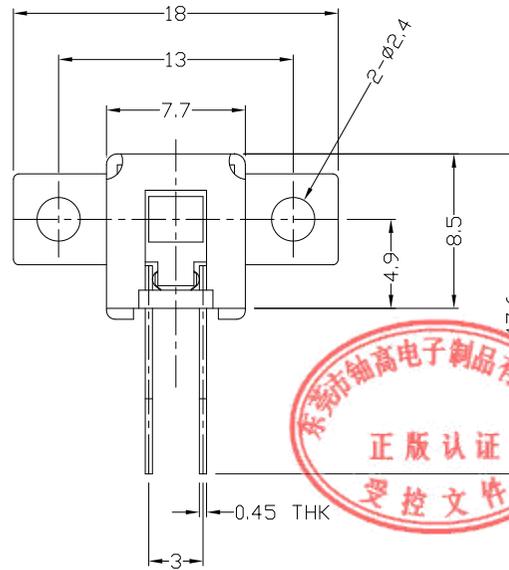


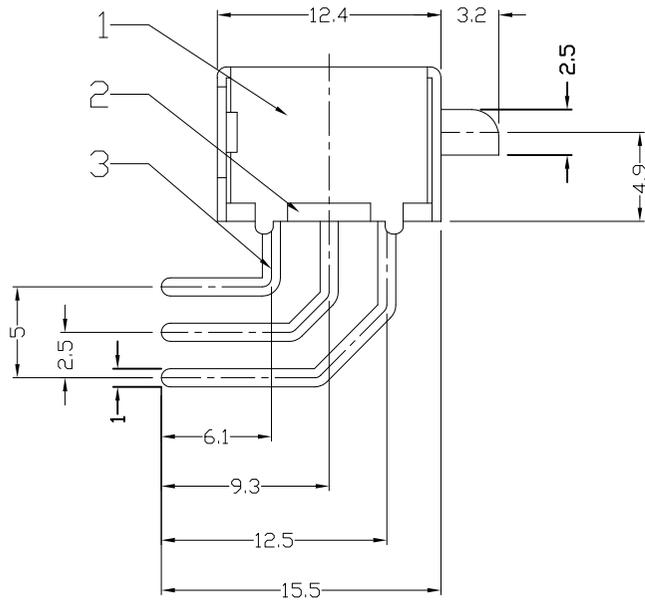


RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

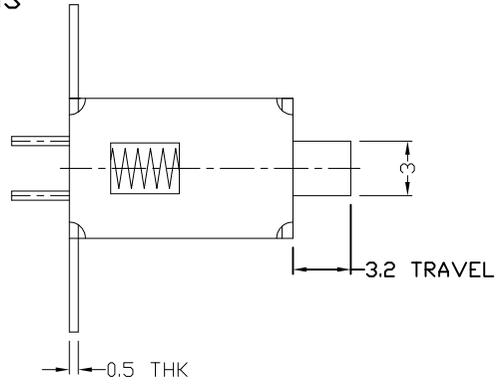

P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC50V 0.3A
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
OPERATING MODE	NON-LOCK
STROKE	FULL 3.2mm
OPERATING FORCE	100±30gf
OPERATING LIFE(cycles)	10,000



8					
7					WITHIN 1.5mm±0.1mm
6	SPRING	STEEL WIRE	1	NATURAL	OVER 1.5mm±0.2mm
5	KNOB	POM	1	BLACK	
4	CONTACT CLIP	PBS STRIP	2	Ag PLATED	
3	TERMINAL	BRASS STRIP	6	Ag PLATED	
2	BASE	PHENOLIC RESIN	1	NATURAL	
1	FRAME	STEEL STRIP	1	Ni PLATED	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	mm	东莞市铀高电子制品有限公司			
MAT'L	SEE NOTE				
FINISH	SEE NOTE	TITLE:	PART NO.		
Q'TY	SEE NOTE	PUSH SWITCH / HORIZONTAL	AP-22F94N		
		DR: Ricky 2015/04/02	DWG NO.:		
		CHKD: Ricky 2015/04/02	ADL-22F94		
		APPD:	SCALE	SHEET	REV.
			2:1	1/1	A
			CUSTOMER DRAWING		