



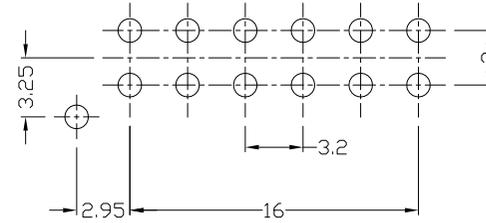


RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.



DIMENSIONS

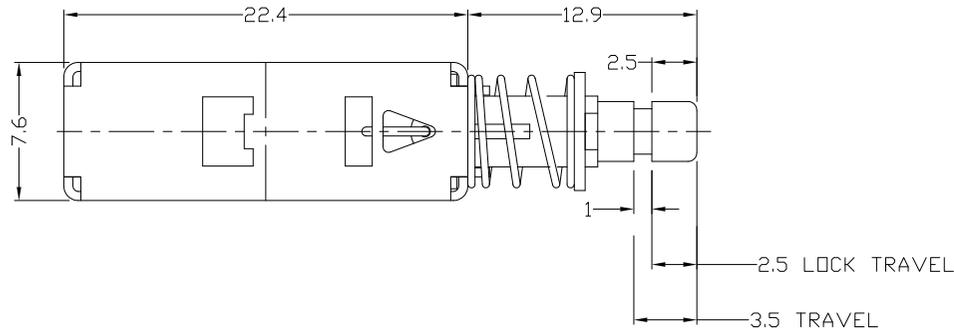

P.C.B LAYOUT
BOTTOM VIEW

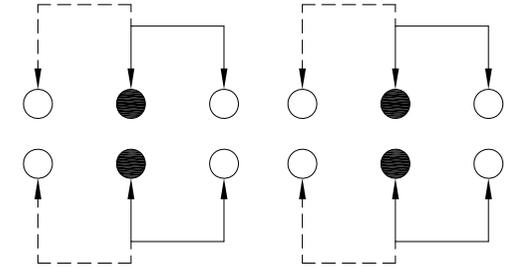

CIRCUIT DIAGRAM

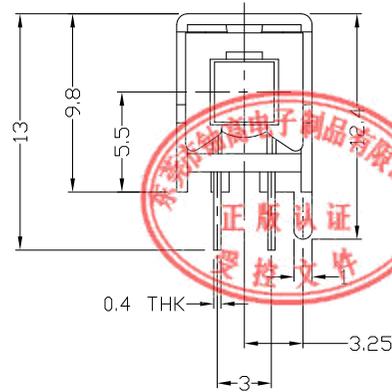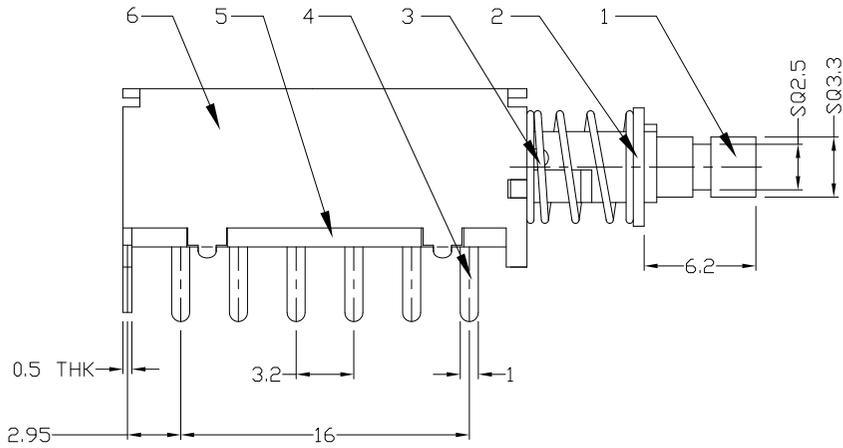

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC50V 0.3A	
CIRCUIT	4P2T	
CONTACT RESISTANCE	100mΩ MAX.	
TIMING	NON-SHORTING	
OPERATING MODE	SELF-LOCK	AP-42F42L
	NON-LOCK	AP-42F43N
STROKE	TOTAL 3.5mm	LOCK 2.5mm
OPERATING FORCE	350±100gf	
OPERATING LIFE(cycles)	10,000	

9	SPRING PLATE	PBS STRIP	1	NATURAL
8	CAM STICK	BRASS WIRE	1	Ni PLATED
7	CONTACT CLIP	PBS STRIP	4	Ag PLATED
6	FRAME	STEEL STRIP	1	Ni PLATED
5	BASE	PHENOLIC RESIN	1	NATURAL
4	TERMINAL	BRASS STRIP	12	Ag PLATED
3	SPRING	STEEL WIRE	1	Ni PLATED
2	BLOCK	STEEL STRIP	1	Ni PLATED
1	KNOB	POM	1	BLACK
NO.	PARTS	MATERIAL	Q'TY	FINISHING

WITHIN 1.5mm±0.1mm
OVER 1.5mm±0.2mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	mm
MAT'L	SEE NOTE
FINISH	SEE NOTE
Q'TY	

东莞市铀高电子制品有限公司

TITLE:	PUSH SWITCH / HORIZONTAL		PART NO.	AP-42F42L & AP-42F43N	
DR:	Ricky 2015/04/08		DWG NO.:	ADL-42F4243	
CHKD:	Ricky 2015/04/08		SCALE	SHEET	REV.
APPD:	2:1	1/1	A	CUSTOMER DRAWING	