




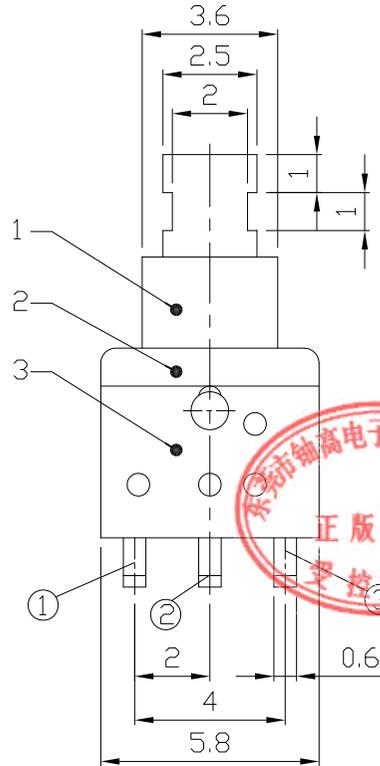


RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

### DIMENSIONS

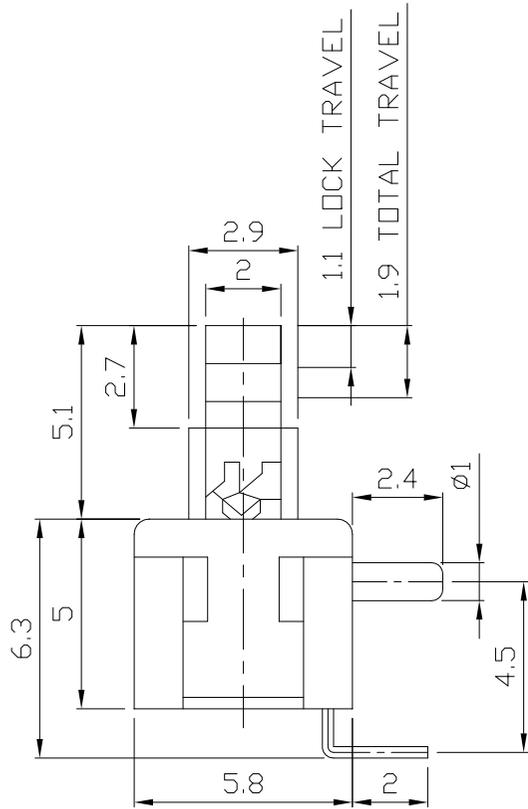

P.C.B LAYOUT  
BOTTOM VIEW




CIRCUIT DIAGRAM

### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.2A 12V DC	
CIRCUIT	2P2T	
CONTACT RESISTANCE	100mΩ MAX.	
TIMING	SELF-LOCK	AP-2216HL
OPERATING MODE	NON-SHORTING	AP-2216HN
STROKE	FULL 1.9mm	LOCK 1.1mm
OPERATING FORCE	180±50gf	
OPERATING LIFE(cycles)	10,000	



NO.	PARTS	MATERIAL	Q'TY	FINISHING
9				
8				
7				
6				
5	SPRING	SUS	1	NATURAL
4	CAM STICK	SUS	1	NATURAL
3	CASE	PA66/BRASS STRIP	1	GREY/Ag PLATED
2	COVER	PBT	1	BLACK
1	KNOB	PBT	1	WHITE/Ag CLAD

WITHIN 1.5mm: ±0.1mm	UNITS mm
OVER 1.5mm: ±0.2mm	MAT'L
	SEE NOTE
	FINISH
	SEE NOTE
	Q'TY


<b>东莞市铀高电子制品有限公司</b>			
TITLE: <b>PUSH SWITCH / HORIZONTAL</b>		PART NO.: <b>AP-2216HL &amp; AP-2216HN</b>	
DR: <i>Ricky</i> 2016/02/19		DWG NO.: <b>ADL-2216H</b>	
CHKD: <i>Ricky</i> 2016/02/19		SCALE	SHEET
APPD:		5:1	1/1
		REV.	CUSTOMER
		A	DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

