



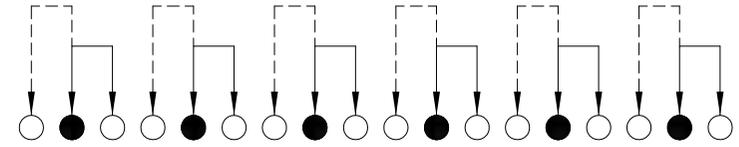

RoHS  
Compliant  
2002/95/EC




REV.	ECN.	NO.	APPD.

### DIMENSIONS

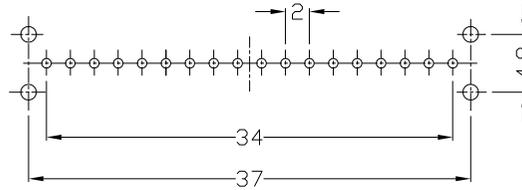

P.C.B LAYOUT  
BOTTOM VIEW

CIRCUIT DIAGRAM

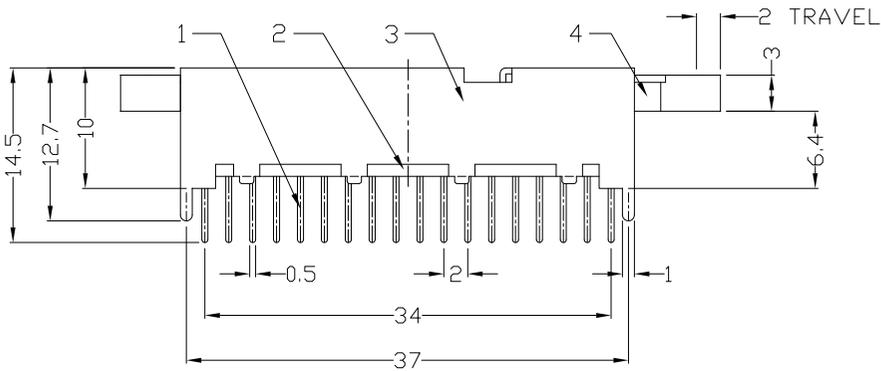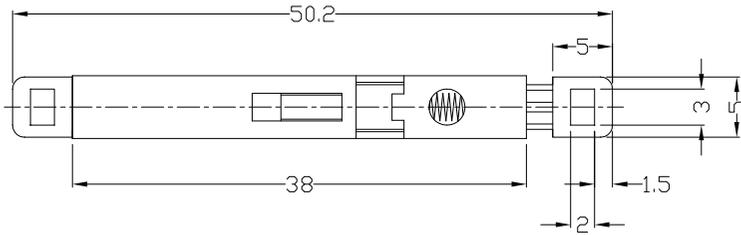

### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC50V 0.3A
CIRCUIT	6P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
OPERATING MODE	NON-LOCK
STROKE	FULL 2mm
OPERATING FORCE	300±100gf
OPERATING LIFE(cycles)	10,000



NO.	PARTS	MATERIAL	Q'TY	FINISHING
8				
7				WITHIN 1.5mm±0.1mm
6	SPRING	STEEL WIRE	1	NATURAL
5	CONTACT CLIP	PBS STRIP	6	Ag PLATED
4	KNOB	ABS	1	BLACK
3	FRAME	STEEL STRIP	1	Ni PLATED
2	BASE	PHENOLIC RESIN	1	NATURAL
1	TERMINAL	BRASS STRIP	18	Ag PLATED

OVER 1.5mm±0.2mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	mm
MAT'L	SEE NOTE
FINISH	SEE NOTE
Q'TY	

东莞市铀高电子制品有限公司			
TITLE:	PUSH SWITCH / HORIZONTAL	PART NO.:	AP-62D01N
DR:	Ricky 2015/04/08	DWG NO.:	ADL-62D01
CHKD:	Ricky 2015/04/08	SCALE	3:2
APPD:		SHEET	1/1
		REV.	A
		CUSTOMER DRAWING	