

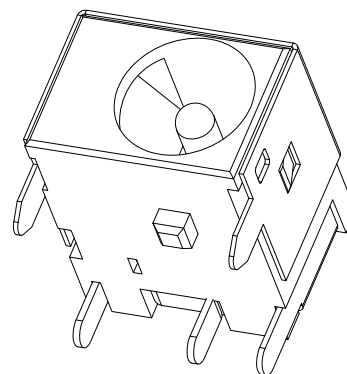
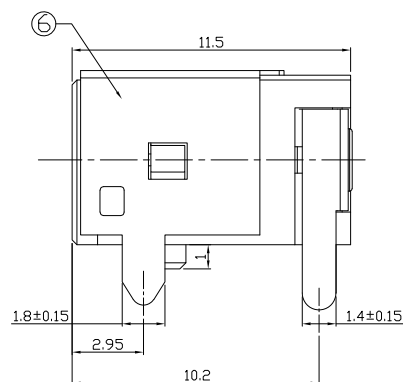



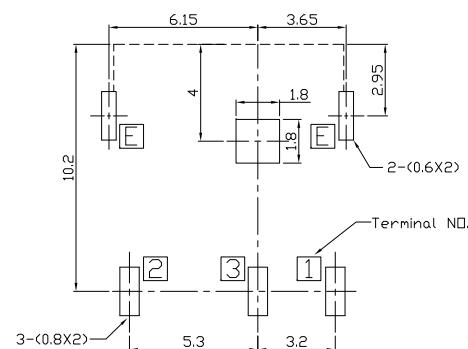


4=Bag packing

8. Preservative temperature range: $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$;

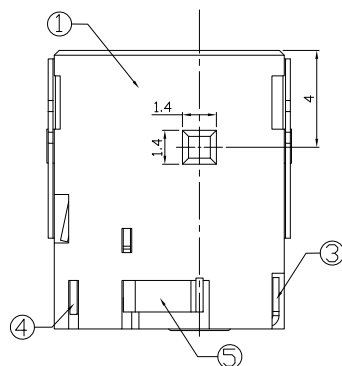

P.C.B Layout
(Copper-sided view)



Model No.	G	H	J
CENTER PIN	ø1.65	ø2.0	ø2.5

○: ITEM NO. □: TERMINAL NO.

⑥	Earth terminal ⑥	Phosphor bronze	1	Ni-Plating	TOLERANCE	ANGLES	UNITS mm
⑤	Shunt terminal ③	Brass	1	Ag-Plating	±0.3	±2°	MAT'L
④	Tip spring ②	Phosphor bronze	1	Ag-Plating			SEE NOTE
③	Center pin contact ①	Brass	1	Ag-Plating			FINISH
②	Center pin ①	Brass	1	Ni-Plating	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		SEE NOTE
①	Housing	PBT/PA9T	1				Q'TY
NO.	PARTS	MATERIAL	Q'TY	FINISHING			

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

东莞市铰高电子制品有限公司				
TITLE: DIP DC POWER JACK		PART NO.: DCB0-0044J		
DR: <i>Ricky</i> 2019/04/29		DWG NO.: AB0-0044J		
CHKD: <i>Ricky</i> 2019/04/29		SCALE	SHEET	REV.
APPD:		1:1	1/1	A
		CUSTOMER DRAWING		