

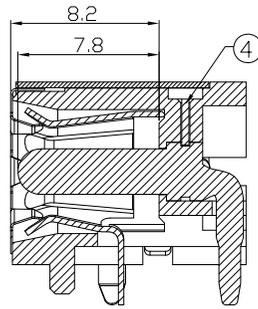




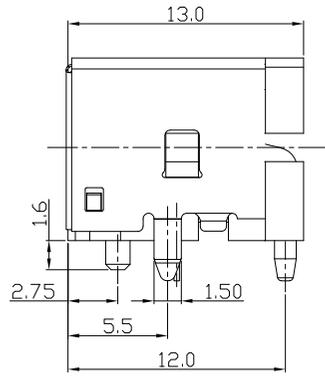


RoHS
Compliant
2002/95/EC

Halogen Free

DIMENSIONS

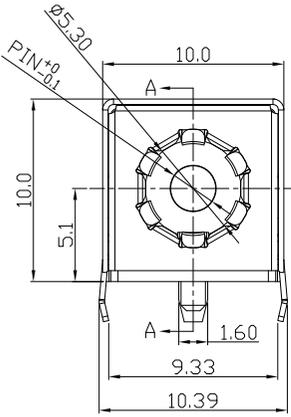

SECTION A-A
(Long Center pin end is Circle)

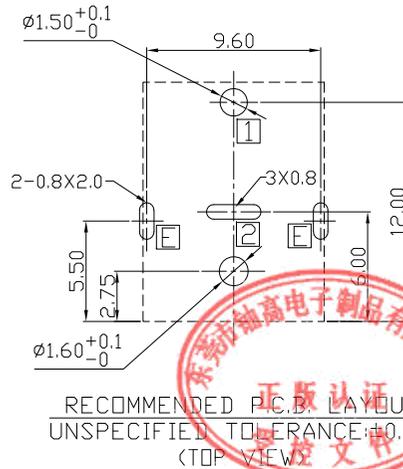

RECOMMENDED P.C.B. LAYOUT
UNSPECIFIED TOLERANCE: ±0.05
(TOP VIEW)

MODEL CODE:

DCB0-0146A- B □ 10 BK S 0 1

(1) (2) (3)(4) (5) (6) (7)(8) (9)

(1):Series type:DIP DC POWER JACK.

(2):Series No.

(3):Schematic option: B

(4):Center pin diameter:

G=1.65 , H=2.0 , J=2.5

(5):Material of housing:

10=PA10T(Standard)

(6):Housing color:

BK=Black , 3C=Orange(157C)

(7):Terminal plating

T=Tin(Sn) , S=Silver(Ag) , G=Gold(Au)



(8):Special option:

0=No Special Option

(9):Packing mode:

1=Reel packing

3=Plastic box packing



SPECIFICATION:

1.Rating : DC 20V 4A;

2.Contact resistance: ≤30mΩ;

After test:≤50mΩ

3.Insulation resistance: ≥100MΩ (DC500V);

After test:≥50MΩ


4.Withstand voltage: 500VAC;

5.Insertion and extraction force: 3-30N;


6.life test: 5,000 cycles;

7.Operation temperature range:-20°C~70°C;

8.Preservative temperature range:-40°C~85°C;



Model No.	G	H	J
CENTER PIN	1.65	2.0	2.5

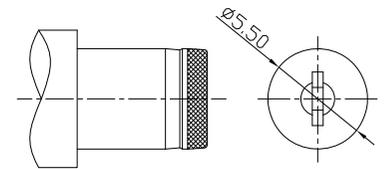

DC MATE PLUG

○: ITEM NO. □: TERMINAL NO.

⑥	Ground Terminal	□	Copper Alloy	1	Ni plating
⑤	Shield plate		Stainless steel	1	
④	Terminal		Copper Alloy	1	
③	Tip spring	②	Copper Alloy	1	See "Ordering info"
②	Center pin	①	Zn Alloy	1	Long Center pin end is Circle Ni plating
①	Housing		High temp.Thermoplastic	1	Halogen Free, Black
NO.	PARTS		MATERIAL	Q'TY	FINISHING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

TOLERANCE	ANGLES	UNITS
.X ±0.50	X ±5°	mm
.XX ±0.30	.X ±3°	MAT'L
.XXX ±0.15	.XX ±2°	SEE NOTE
		FINISH
		SEE NOTE
		Q'TY

东莞市铀高电子制品有限公司			
TITLE: DIP DC POWER JACK		PART NO.: DCB0-0146A	
DR: Ricky 2019/05/03		DWG NO.: AB0-0146A	
CHKD: Ricky 2019/05/03		SCALE	SHEET
APPD:		1:1	1/1
		REV.	CUSTOMER DRAWING
		A	