



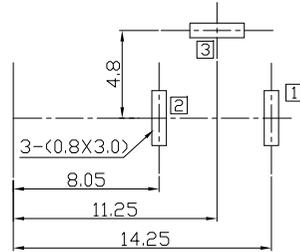


RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

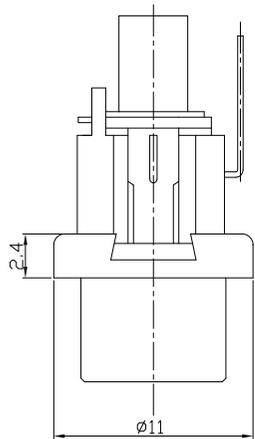

P.C.B Layout  
(Printed-sided view)

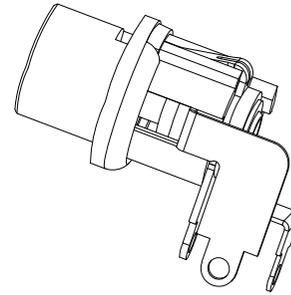

MODEL CODE:

DCB0-01240- A □ PB BK S 0 4

(1) (2) (3)(4) (5) (6) (7)(8) (9)

(1):Series type:DIP DC POWER JACK.

(2):Series No.

(3):Schematic option: A , B

(4):Center pin diameter:

H=∅2.0 , J=∅2.5

(5):Material of housing:

PB=PBT (Only)

(6):Housing color:

BK=Black (Only)

(7):Terminal plating

S=Silver(Ag)

T=Tin(Sn)

C=copper&tin alloy plating (Standard)

(8):Special option:

0=No special option

(9):Packing mode:

4=Bag packing

SPECIFICATION:

1.Rating : DC 30V 3A;

2.Contact resistance: ≤30mΩ;

3.Insulation resistance: ≥100MΩ (DC250V);





4.Withstand voltage: 500VAC ;

5.Insertion and extraction force: 3-30N;

6.life test: 5,000 cycles;

7.Operation temperature range:-20°C~70°C;

8.Preservative temperature range:-40°C~85°C;

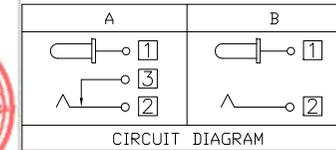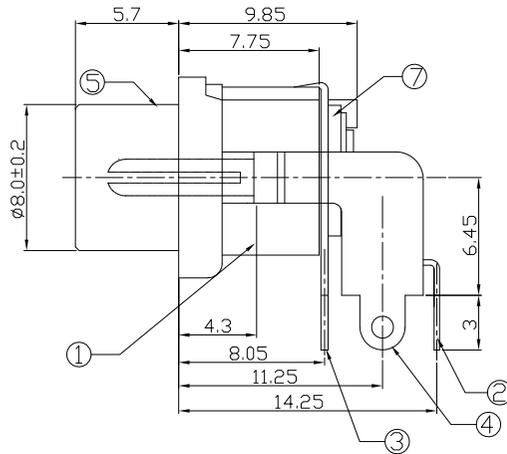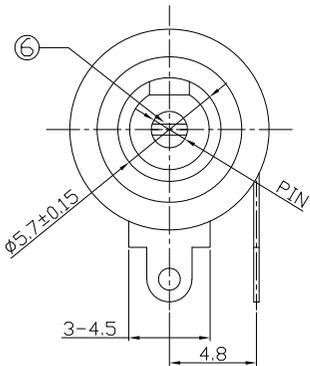

DC MATE PLUG

Model No.	H	J
CENTER PIN	∅2.0	∅2.5

○: ITEM NO. □: TERMINAL NO.

NO.	PARTS	MATERIAL	Q'TY	FINISHING	TOLERANCE	ANGLES	UNITS
6	Center pin	Phosphor bronze	1	Ni-Plating			mm
5	Bushing	Brass	1	Ni-Plating	±0.3	±2'	MAT'L
4	Shunt terminal	Phosphor bronze	1	Cu-Sn-Plating			SEE NOTE
3	Tip spring	Phosphor bronze	1	Cu-Sn-Plating			FINISH
2	Center pin terminal	Brass	1	Cu-Sn-Plating			SEE NOTE
1	Housing	PBT	1	Black			Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

<b>东莞市铀高电子制品有限公司</b>			
TITLE: DIP DC POWER JACK		PART NO.: DCB0-01240	
DR: Ricky 2019/05/03		DWG NO.: AB0-01240	
CHKD: Ricky 2019/05/03		SCALE: 1:1	SHEET: 1/1
APPD:		REV.: A	CUSTOMER DRAWING