




RoHS  
Compliant  
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

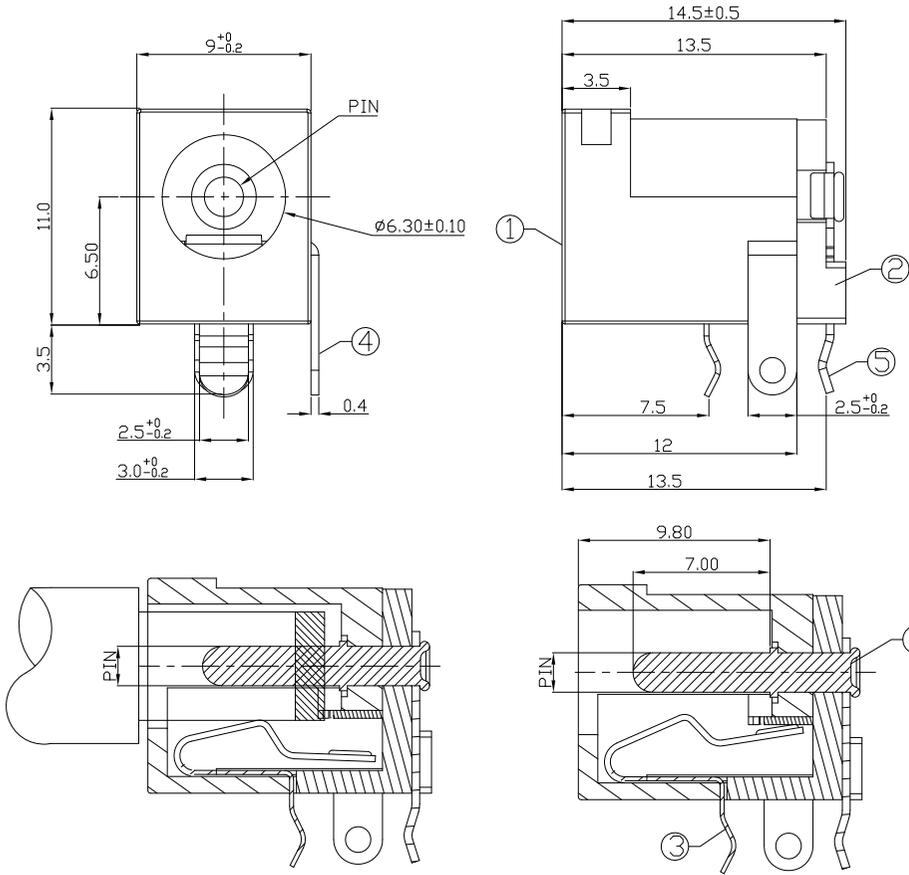

MODEL CODE:

DCS0-0203E- A □ PB BK S 0 4

(1) (2) (3)(4) (5) (6) (7)(8) (9)

(1):Series type:DIP DC POWER JACK.

(2):Series No.

(3):Schematic option: A

(4):Center pin diameter:

G=φ1.65 , H=φ2.0 , J=φ2.5

(5):Material of housing:

PB=PBT

(6):Housing color:

BK=Black

(7):Terminal plating


S=Silver(Ag)

(8):Special option:

0=No special option

(9):Packing mode:

4=Bag packing



Specification:

1.Rating : DC 30V 1A.

2.Contact resistance : ≤100mΩ.


3.Insulation resistance : ≥100MΩ (DC250V).

4.Withstanding voltage: 500VAC .


5.Insertion and extraction force: 3~30N.

6.life test: 5000cycles min.


7.Operation temperature range:-25°C~85°C

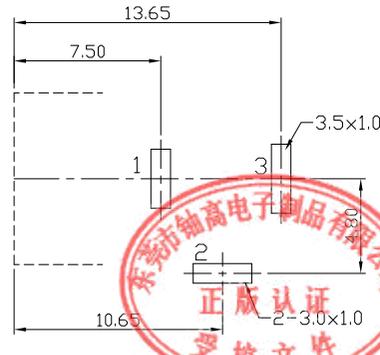

P.C.B LAYOUT  
TOP VIEW



Model No.	G	H	J
CENTER PIN	φ1.65	φ2.0	φ2.5

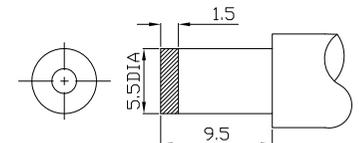

DC MATE PLUG

Bill of materials:

NO.	PARTS	MATERIAL	Q'TY	FINISHING
6	PIN	BRASS	1	Ni-Plating
5	FLAP FOOT	BRASS	1	Ag-Plating
4	CURVE PIECE	BRASS	1	Ag-Plating
3	SPRING PIECE	BRONZE	1	Ag-Plating
2	COVER	PBT	1	UL94V-0 BLACK
1	HOUSING	PBT	1	UL94V-0 BLACK

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

TOLERANCE				ANGLES		UNITS		东莞市铀高电子制品有限公司			
.X ± 0.3				X°.±5°		mm					
.XX ± 0.2				.X°.±3°		MAT'L		DIP DC POWER JACK			
.XXX ± 0.1						SEE NOTE					
						FINISH		PART NO.: DCS0-0203E			
						SEE NOTE					
						Q'TY		DWG NO.: ASS-0203E			
						APPD:		TITLE:		DR: Ricky 2019/03/21	
								CHKD: Ricky 2019/03/21		SCALE	
								APPD:		SHEET	
								APPD:		REV. A	
								APPD:		CUSTOMER DRAWING	