

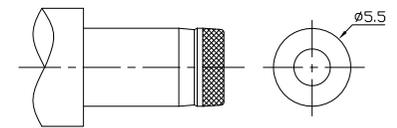



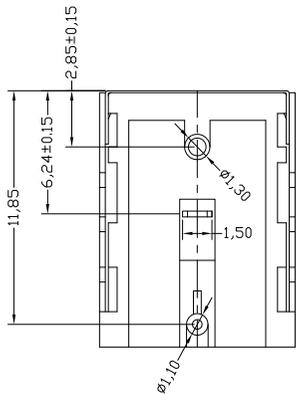


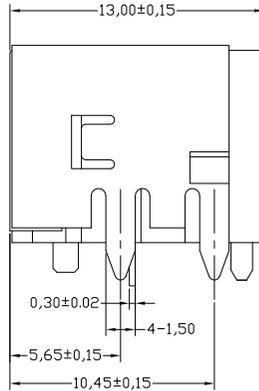

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

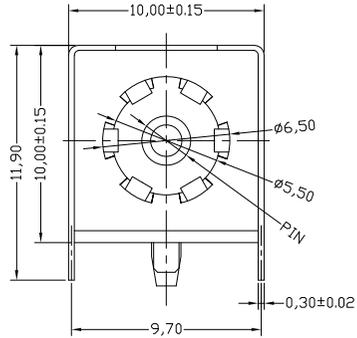

Model No.	H	J
CENTER PIN	ø2.0	ø2.5

MODEL CODE:

DCS0-02000- D □ 9T BK S 0 3

(1) (2) (3)(4) (5) (6) (7)(8) (9)

(1):Series type:DIP DC POWER JACK.

(2):Series No.

(3):Schematic option: D

(4):Center pin diameter:
H=ø2.0 , J=ø2.5

(5):Material of housing:
9T=PA9T

(6):Housing color:
BK=Black

(7):Terminal plating
S=Silver(Ag)

(8):Special option:
0=No special option

(9):Packing mode:
3=Plastic box packing

Specification:

1.Rating :DC 50V 3A.

2.Contact resistance :≤100mΩ

3.Insulation resistance :≥100MΩ (DC250V).

4.Withstanding voltage: 500VAC .

5.Insertion and extraction force: 3~30N.

6.life test: 5000cycles min.

7.Operation temperature range:-25°C~85°C



Bill of materials:

NO.	PARTS	MATERIAL	Q'TY	FINISHING	TOLERANCE	ANGLES	UNITS	东莞市铀高电子制品有限公司			
5	SPACER	9T NYLON (BLACK)	1		.X ± 0.35	X°.±5°	mm	TITLE: DIP DC POWER JACK PART NO.: DCS0-02000			
4	BERRY PIN	COPPER ALLOY	1	Ag-Plating	.XX ± 0.25	.X°±3°					
3	CCAW	COPPER ALLOY	1	Ag-Plating	.XXX ± 0.15			DR: Ricky 2019/03/22 DWG NO.: ASS-02000			
2	FOOT COVERLET	COPPER ALLOY	1	Ag-Plating							
1	HOUSING	9T NYLON (BLACK)	1		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			CHKD: Ricky 2019/03/22			
								APPD:			
								SCALE	SHEET	REV.	CUSTOMER
								1:1	1/1	A	DRAWING