

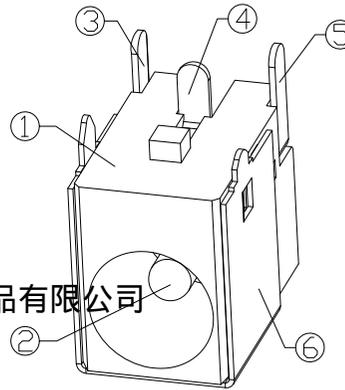


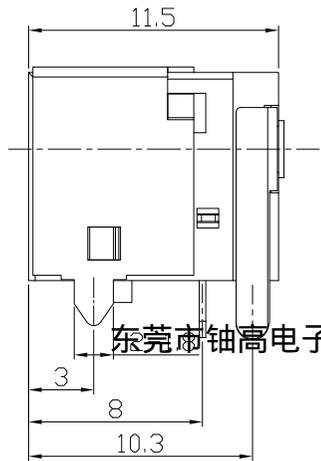

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

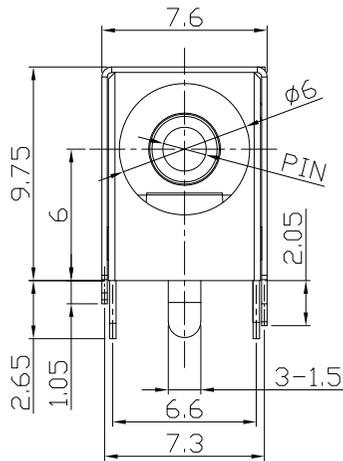

东莞市铀高电子制品有限公司



MODEL CODE:

DCB0-0036A- A □ PB BK S 0 4



- (1):Series type:DIP DC POWER JACK.
- (2):Series No.
- (3):Schematic option: A , B
- (4):Center pin diameter:
G=φ1.65 , H=φ2.0 , I=φ2.35 , J=φ2.5
- (5):Material of housing:
PB=PBT (Standard)
- (6):Housing color:
BK=Black
- (7):Terminal plating
S=Silver(Ag)
- (8):Special option:
0=No special option
- (9):Packing mode:
4=Bag packing

SPECIFICATION:

- 1.Rating : DC 12V 1A;
- 2.Contact resistance: ≤30mΩ;
- 3.Insulation resistance: ≥100MΩ (DC250V);
- 4.Withstand voltage: 500VAC ;
- 5.Insertion and extraction force: 3-30N;
- 6.life test: 5,000 cycles;
- 7.Operation temperature range:-20°C~70°C;
- 8.Preservative temperature range:-40°C~85°C;

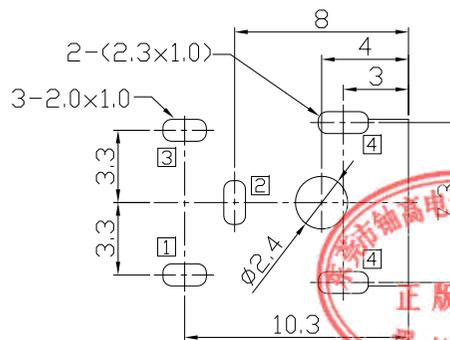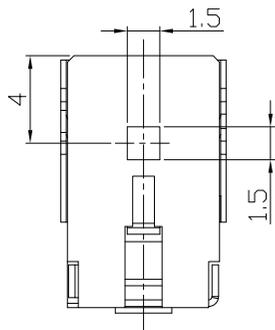

P.C.B Layout
(Copper-sided view)

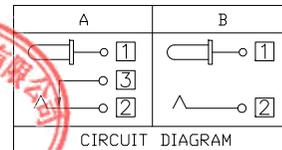

DC MATE PLUG

Model No.	G	H	I	J
CENTER PIN	φ1.65	φ2.0	φ2.35	φ2.5
DC MATE PLUG	φ4.0	φ5.5	φ5.5	φ5.5

○: ITEM NO. □: TERMINAL NO.

NO.	PARTS	MATERIAL	Q'TY	FINISHING	TOLERANCE	ANGLES	UNITS
⑥	Shield plate	④ Brass t=0.25	1	Nickel(Ni) Plating			mm
⑤	Shunt terminal	③ Brass t=0.3	1	Silver(Ag) Plating	±0.3	±2'	MAT'L
④	Tip spring	② SUS301 t=0.3	1	Silver(Ag) Plating			SEE NOTE
③	Center pin terminal	① Brass t=0.3	1	Silver(Ag) Plating			FINISH
②	Center pin	① Brass	1	Nickel(Ni) Plating			SEE NOTE
①	Housing	PBT UL94V-0	1				Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.

SEE NOTE	TITLE: DIP DC POWER JACK	PART NO.: DCB0-0036A
SEE NOTE	DR: <i>Ricky</i> 2019/04/12	DWG NO.: AB0-0036A
Q'TY	CHKD: <i>Ricky</i> 2019/04/12	SCALE SHEET REV. CUSTOMER 1:1 1/1 A DRAWING
APPD:		